


51 S. Walnut St., P.O. Box 348
 Wauregan, CT 06387-0348
 Phone: (860) 774-4812
 Fax: (860) 774-7330



**3 CONDUCTOR OVERALL
 JACKETED CABLE**

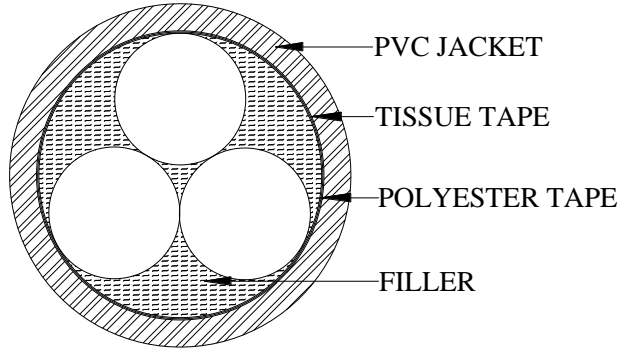

- 1.0 PRIMARIES:**
 10 AWG (105/30) Bare Copper
 Polyvinyl Chloride, .160" ± .004" Diameter
- 2.0 OVERALL CABLE:**
 Number of Primaries: 3
 Color Code: 1. Brown
 2. Light Blue
 *3. Green/Yellow (IEC)
 Filler: As Required for Roundness
 Polyester tape, 25% Overlap
- 3.0 JACKET:**
 Separator: Tissue Tape - Required
 Polyvinyl Chloride, .044" Wall Thickness
 .460" ± .012" Final Diameter
 Color: Black
Print Legend: GEMS 2280879-4 10 AWG 3/C
 E41663 RU AWM 2587 90°C 600V --- LL33361
 CSA AWM I/II A/B 90°C 600V FT4
- 4.0 FINISHED PRODUCT REQUIREMENTS:**
 UL AWM: 2587 90°C 600V
 CSA AWM I/II A/B 90°C 600V FT4

 *Stripe to be 40% Longitudinal

C	Primary corrected to 0.160 OD, was 0.170	JM 10/21/2011	ALL VALUES ARE NOMINAL UNLESS SPECIFIED OTHERWISE <u>PROPRIETARY INFORMATION</u> DO NOT DUPLICATE WITHOUT WRITTEN CONSENT FROM C&M	C&M DESCRIPTION 3 CONDUCTOR OVERALL JACKETED CABLE	
B	Jacket OD was .443", jacket wall was .035"	Don Nester 06/04/2002			
A	INITIAL RELEASE	JCA 4/19/02			
			APPROVALS	C&M PART NUMBER	REV
REV	DESCRIPTION	ENG/DATE	DRAWN	JAS	50002
				04/19/02	C

REVISION STATUS