




DESC: 10/4 AWM 2463 80°C 600V CONST. A		NWI NO: 1004A001
SCALE: 10x	DATE: 9/15/97	DR. BY: DP LANGER NWI P/N: FAWM104-001
CUSTOMER: INDUSTRIAL ELECTRIC		CUSTOMER PART NO: 1004CSS-ONWA

ITEM	SPECS.
A.	10 GAUGE 105x30TC BUNCHED NOM. O.D. .120±.006"
B.	31 MILS PVC INSULATION 105°C 600V 28 MILS MIN. PVC INSULATION NOM. O.D. .186±.002" AWM STYLE 1015
C.	POLY FILLER
D.	CLEAR MYLAR WRAP 20% MIN. OVERLAP 100% COVERAGE
E.	90% MIN. TC BRAID SHIELD 36 GAUGE SINGLE ENDS
F.	60 MILS TUBED PVC JACKET 80°C 600V 48 MILS MIN. PVC JACKET BLACK JACKET CABLE IS UL AND CSA APPROVED

**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

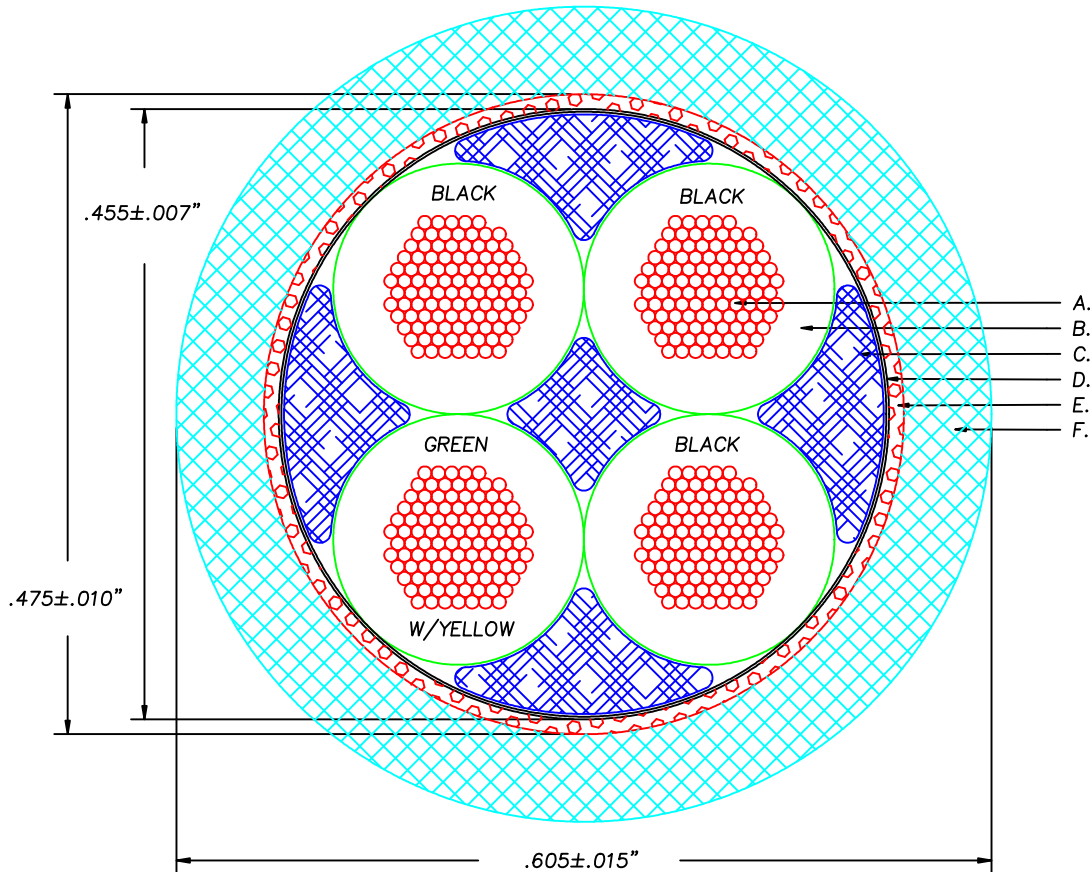

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

REMOVED LEGEND FROM DRAWING	C	04/09/08	GES	
CHANGED CUSTOMER PART NUMBER	B	6/25/03	DPL	
INITIAL RELEASE	A	9/15/97	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL