


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
8/3/2009	C	20977	SPECIFICATION UPDATED

Parent Number: F18041-

Description: 18 16/30 TC AWM 1569 or 1007 TR-64 or
AWM I A/B

DIAMETER: 0.079
TOLERANCE ± : 0.003

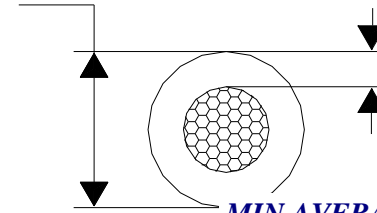

MIN AVERAGE WALL: 0.015

MINIMUM WALL: 0.013

Stranding: 16/30 TC LHL

Style: UL: AWM 1007 OR 1569 CSA: TR-64 or AWM I A/B

Insulation: PVC

Print Legend: 18 AWG (0.823mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM 1569 105C OR 1007 80C 300V VW-1 --- 156016 CSA TR-64 90C FT1 OR
AWM I A/B 105C 300V FT1

Voltage: 300V

Temperature: 1569=105C, 1007=80C, TR64=90C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

