


# PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/9/2009	D	20977	SPECIFICATION UPDATED

**Parent Number:** F22021-

**Description:** 22 7/.0096 TC AWM 1569 or 1007 TR-64 or AWM I A/B

**DIAMETER:** 0.062  
**TOLERANCE ±:** 0.003

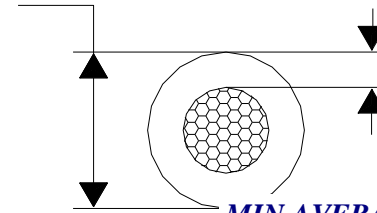

**MIN AVERAGE WALL:** 0.015

**MINIMUM WALL:** 0.013

**Stranding:** 7/.0096 TC LHL

**Style:** UL: AWM 1569 or 1007 CSA: TR-64 or AWM I A/B

**Insulation:** PVC

**Print Legend:** 22 AWG (0.324mm<sup>2</sup>) E96824 (PLANT ID CODE) (AWM LOGO) AWM 1569 105C OR 1007 80C 300V VW-1 --- 156016 CSA TR-64 90C FT1 OR AWM I A/B 105C 300V FT1

**Voltage:** 300V

**Temperature:** 1569=105C, 1007=80C, TR64=90C

**Notes:** 1. Cold Bend: UL = -10C, CSA = -30C.

This product complies with European Directive 2002/95/EC (RoHS)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

**Customer Approval:**

**Customer Part Nbr(s):** \_\_\_\_\_

**Approved By:** \_\_\_\_\_ **Date:** \_\_\_\_\_

**Title:** \_\_\_\_\_ **Company Name:** \_\_\_\_\_

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

