


UL 2509 24/2C mPPE/PVC Cable



PRODUCT DATA SHEET

Internal wiring of electronica equipment.

Design Number 10113
Part Number See Table 1
Customer Number N/A

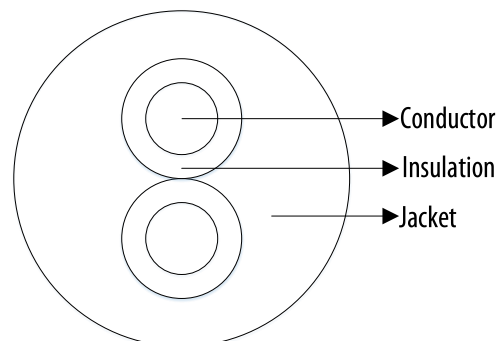

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 24AWG(19/36)
Insulation: mPPE
Insulation Thickness: 0.007"(Nom.)
Insulation Diameter: 0.038"(Nom.)
Jacket Material: Polyvinyl Chloride
Jacket Avg. Thickness: 0.015"(Nom.)
Overall Diameter: 0.112"(Nom.)
Jacket Color: White or Black

Print Legend:

ASCENT E477982 UH 2C 24AWG AWM 2509 80C 300V VW-1 --- c
AWM I/A/B FT1 80C 300V CE ROHS

Table 1

Part Number	Color
32106797	Black
32106798	White

Color Code: Black, Red

PHYSICAL CHARACTERISTICS

Operating Temperature (°C): 80°C
Operating Voltage: 300V
Flame Test: UL VW-1

SAFETY CHARACTERISTICS

RoHS EU Directive 2011/65/EU (1&2)
REACH Regulation 169
California Prop 65 compliant

Application: Internal wiring of electronic equipment.

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/11/19	Initial release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

