

# PRODUCT SPECIFICATION

DATE	REV	ECN	DESCRIPTION
7/16/2009	E	20977	SPECIFICATION UPDATED

Parent Number: **F10012-**

Description: **10 105/30 TC MTW or BC-5W2 or THHW or AWM 1011/1015/1230/1335 or 1032 TEW or AWM I A/B**

Stranding: **105/30 TC LHL**

Style: **UL: MTW or BC-5W2 or THHW or AWM 1011/1015/1230/1335 or 1032 CSA: TEW or AWM I A/B**

Insulation: **PVC**

Print Legend: **10 AWG (5.27mm<sup>2</sup>) E125352 (PLANT ID CODE) (UL) BC-5W2 OR MTW OR THHW OR AWM 1011/1015/1230/1335 600V OR 1032 1000V MOISTURE RESISTANT VW-1 -- 156016 CSA TEW 105C 600V FT1 OR AWM I A/B 105C 600V FT1**

Voltage: **600V, 1032=1000V**

Temperature: **Dry=105C, Wet=75C, 1032=90C**

Notes: 1. Min. Temp Rating = -40C

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): \_\_\_\_\_

Approved By: \_\_\_\_\_


Date: \_\_\_\_\_

Title: \_\_\_\_\_

Company Name: \_\_\_\_\_

**DIAMETER: 0.175**

**TOLERANCE ±: 0.003**

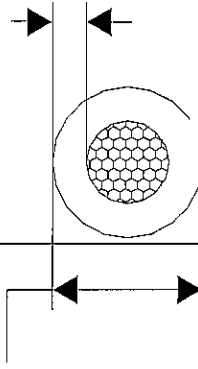

**MIN AVERAGE WALL: 0.030**

**MINIMUM WALL: 0.027**

**COLEMAN CABLE, INC**

1530 Shields Drive  
Waukegan, IL 60085

Phone: 1-800-323-9355  
www.colemancable.com

