

PRODUCT SPECIFICATION


DATE	REV	ECN	DESCRIPTION
10/27/2015	D		SPECIFICATION UPDATED

Parent Number: F16030-

Description: 16 26/30 TPCT AWM
1015/1230/1011/1335/1032 TEW or AWM I
A/B

DIAMETER: 0.117

TOLERANCE ±: 0.003

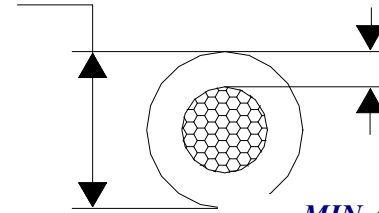

MIN AVG WALL: 0.030

MINIMUM WALL: 0.027

Stranding: 26/30 TPCT LHL

Style: UL: AWM 1011/1015/1230/1335 or 1032 CSA: TEW or AWM
I A/B

Insulation: PVC

Print Legend: 16 AWG (1.31mm²) E57498 (PLANT ID CODE) (AWM LOGO) AWM 1015/1230 105C or 1011 80C or 1335 90C 600V or 1032 90C 1000V VW-1 ---
156205 CSA TEW 105C 600V FT1 or AWM I A/B 105C 600V FT1

Voltage: 600V, 1032=1000V

Temperature: 1015=105C, 1230: DRY=105C WET=60C, 1011=80C, 1032=90C, 1335: DRY=90C WET=60C; TEW/AWM I A/B=105C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

