


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
5/4/2005	E	8677	UPDATED TOLERANCE

Parent Number: F18117-

Description: 18 16/30 TPCT AWM
1015/1230/1011/1335/1032 TEW or AWM I
A/B

DIAMETER: 0.106
TOLERANCE ± : 0.003

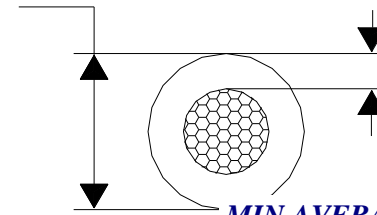

MIN AVERAGE WALL: 0.030

MINIMUM WALL: 0.027

Stranding: 16/30 Topcoat

Style: UL: AWM 1015/1230/1011/1335/1032 CSA: TEW or AWM I
A/B

Insulation: PVC

Print Legend: 18 AWG (0.823mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM 1015/1230 105C or 1011 80C or 1335 90C 600V or 1032 90C 1000V VW-1 --- 156016 CSA TEW 105C 600V FT1 or AWM I A/B 105C 600V FT1

Voltage: 600V, 1032=1000V

Temperature: 105C,1011=80C,1335 & 1032=90C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

