


# UL 1213 – 24AWG Teflon PTFE Wire

## 19 Strands Silver Plated Copper



PRODUCT DATA SHEET

Internal wiring of appliances where exposed to oil at temperature not exceeding 60C.

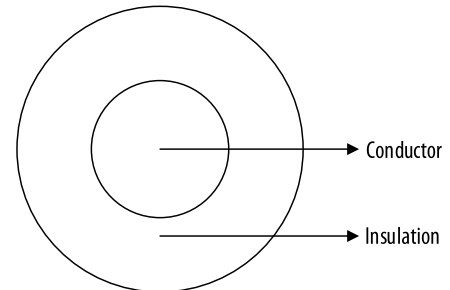

**Design Number** 10228  
**Part Number** Table 1  
**Customer Number** N/A

### CONSTRUCTION

**Conductor:** Stranded silver plated copper  
**Conductor Size:** 24AWG, 19 strands  
**Conductor Diameter:** 0.024" (Nom.)  
**Insulation Material:** Extruded Polytetrafluoroethylene (PTFE)  
**Avg. Thickness:** 0.010" (Nom.)  
**Insulated Diameter:** 0.044" (Nom.)  
**Insulation Color:** A variety of colors available

### ELECTRICAL CHARACTERISTICS

**Operating Temperature (°C):** -60°C to +200°C  
**Operating Voltage:** 600V  
**Conductor Resistance@20°C:** 77.4 Ω/km Max  
**Dielectric Test:** AC 1.0 kV/1 min

### SAFETY CHARACTERISTICS

**Reference Standards:** UL 758, UL 1581, and Style Page UL 1213  
**Approvals:** AWM UL 1213  
**RoHS Compliant**

Table 1

Part Number	Insulation Color
32173844	Red
32173845	Black
32173846	White
32173847	Green

**Application:** Common applications include military harnessing power supply lead time, appliance wiring, and medical electronics.

*All trademarks are property of their respective owners. All specifications are subject to change.*

Revision History		
00	2022/11/10	Initial release
01	2023/02/13	Add part numbers
Created L. Jian	Approved A. Huang	

**Milwaukee** | 5001 South Towne Dr. New Berlin, WI 53151, USA  
**Frankfurt** | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany  
**Luton** | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK  
**Suzhou** | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

