

UL CMG/2464 22AWG/6C Gray



PRODUCT DATA SHEET

Cable is suitable for installation under NEC (NFPA 70) article 800 guidelines.
Cable is suitable for installation in Canada under Section 60 of CEC, Part I.
Internal wiring or external interconnection of electronic equipment.

Design Number 10244
Part Number N/A
Customer Number N/A


CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 22AWG(7/30)
Insulation: Semi-Rigid Polyvinyl Chloride
Insulation Diameter: 0.048"(Nom.)
Filler: Fibrillated Polypropylene
Wrapping: Al-mylar (foil facing in)
Drain Wire: Stranded tinned copper, 22AWG 19 Strands
Jacket Material: Polyvinyl Chloride
Jacket Thickness: 0.033"(Nom.)
Overall Diameter: 0.218"(Nom.)
Jacket Color: Gray

Print Legend:

ASCENT E478021 ** 22AWG 6C SHIELDED 75C C(UL)US CMG SUN RES FT4
OR AWM 2464 80C 300V "ROHS COMPLIANT" MADE IN USA

** is pending

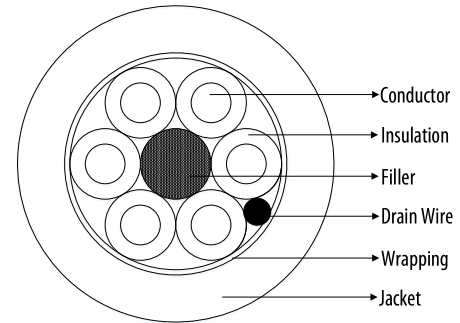

Color Code: 1. Orange 2. Red 3. Green 4. Black 5. Blue 6. White

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 80°C
Operating Voltage: 300V
Weight: 33 Lbs/Mft

SAFETY CHARACTERISTICS

Approvals: UL AWM Style 2464 per UL standard 758
C(UL)US listed as CMG per UL standard 444 and per CSA C22.2 No. 214-17
RoHS Compliance: European Directive 2015/863/EU

Application: Internal wiring or external interconnection of electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/03/24	Initial Release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

