


UL 1199 – 12AWG Teflon PTFE Wire



PRODUCT DATA SHEET

Internal wiring of appliances and electronic equipment.

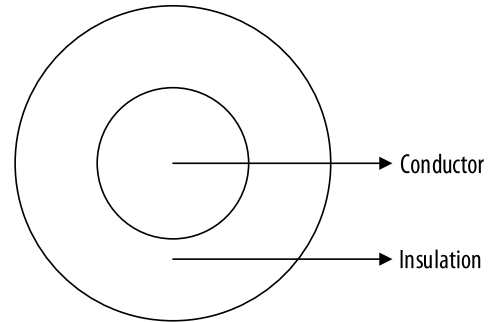

Design Number 10336
Part Number N/A
Customer Number N/A

CONSTRUCTION

Conductor: Stranded silver plated copper
Conductor Size: 12AWG(19/0.49)
Conductor Diameter: 0.096"(Nom.)
Insulation Material: Extruded Polytetrafluoroethylene (PTFE)
Avg. Thickness: 0.020"(Nom.)
Insulated Diameter: 0.137"(Nom.)
Insulation Color: A variety of colors available

Print Legend:

ASCENT E477982 CS  AWM STYLE 1199 12AWG 200°C 600V VW-1

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 200°C
Operating Voltage: 600V
Conductor Resistance@20°C: 5.64 Ω/km Max
Dielectric Test: AC 2.0 kV/1 min

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU
Reference Standards: UL 758, UL 1581, and Style Page UL 1199
Approvals: AWM UL 1199

Application: For use in electronic and appliance applications. Rated for continuous use up to 200°C

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/07/01	Initial release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA

Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

