
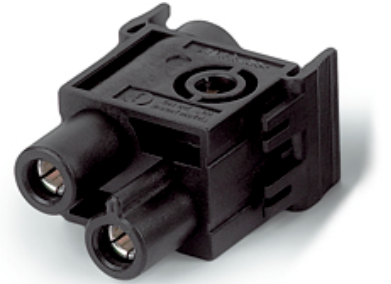


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® MC Module: High Current 2pole	05.11.2015

The mixed assembly guarantees high flexibility. For applications in mechanical and plant engineering, for printing machines and slide-in technology.

The mix of different functions in one plug guarantees high flexibility

Screw connection up to 25mm² for easy assembly without special tools



Automation & fältinstallation



Industrial machinery and plant engineering



Wind Energy

Info

High power module 2pole with screw connection

Lever for rapid removal of the module

Application range

Plant engineering

Printing machines

Control engineering

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Stripping length (mm):	15
Rated voltage (V):	IEC: 1000 V UL: 600 V CSA: 600 V
Rated current (A):	82 A
Contact resistance:	< 2 mOhm
Contacts:	Copper alloy, hard silver-plated
Number of contacts:	2
Termination methods:	Screw termination: 10 - 25 mm ²
Cycle of mechanical operation:	100
Temperature range:	-40°C to +100°C, short-term up to +125°C
VDE-tested:	Certified production control: VDE-REG. no. A870 UL-tested: UL File Number: E75770
Degree of soiling:	3


Product Management	Document: LAPP_PRO809EN.pdf	1 / 3
--------------------	-----------------------------	-------




EPIC® MC Module: High Current 2pole


05.11.2015

Part number	Article description	Contact type	Number of operating contacts	Slots	Pieces / PU
Module: high current 2-pin (occupies 2 slots in the MCR frame)					
10344100	MCS-HC 2	male	2	2	5
10345100	MCB-HC 2	female	2	2	5


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® MC Module: High Current 2pole	05.11.2015

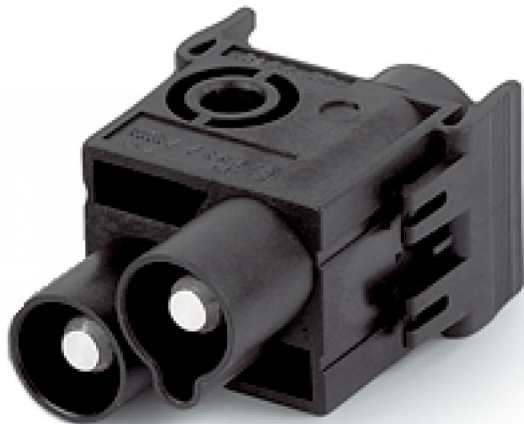

M



F



Product Management	Document: LAPP_PRO809EN.pdf	3 / 3
--------------------	-----------------------------	-------