

2x4.0+1x6.0 Screened Mains Cable

Two double screened PVC sheathed flexible 3 core mains cables. The double plain copper braid screens give good screening properties whilst retaining cable flexibility. The outer sheath is colored grey to match with most computer systems.


Design Number 10367
Part Number 32052236
Customer Number N/A

CONSTRUCTION

Conductor A: Stranded bare copper
Conductor Size A: 6.0mm²(85/0.30mm)
Insulation A Material: PVC
Insulation A Thickness: 0.80mm (Nom.)
Insulated A Diameter: 4.80mm (Nom.)
Conductor B: Stranded bare copper
Conductor Size B: 4.0mm²(56/0.30mm)
Insulation B Material: PVC
Insulation B Thickness: 0.80mm (Nom.)
Insulated B Diameter: 4.20mm (Nom.)
Tape: Mylar
Braid 1: 24/6/0.20mm, Tinned copper
Braid 2: 24/6/0.20mm, Tinned copper
Jacket Material: PVC
Jacket Thickness: 1.20mm (Nom.)
Overall Diameter: 13.90mm (Nom.)
Jacket Color: Grey (RAL 7001)

Print Legend:

3 Core Scrn Mains 2x4.0mm² + 1x6.0mm² Cable 80°C+MeterMark

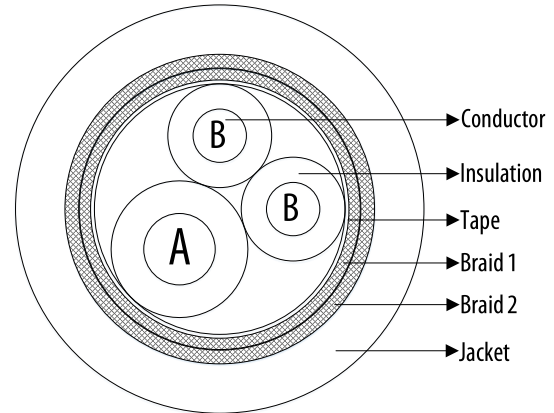

Color Code: A. Green /Yellow B. Brown, Blue

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): +80°C
Operating Voltage: 300V
Conductor A DC Resistance@20°C: 3.1 Ω/km Max
Conductor B DC Resistance@20°C: 4.7 Ω/km Max

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU

Application: Suitable for use with computers, other digital systems and analogue systems vulnerable to electromagnetic and RF interference.

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/08/20	Initial release
Created L. Jian		Approved A. Huang

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA

Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122