


U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>EPIC® H-A 10 TG</b>	05.11.2015

These connectors are attractive because of their compact housing.  
Small and space-saving for narrow available space



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



#### Info

Non-slip ridges for comfortable disconnecting

#### Application range

Machine and equipment manufacturing  
Control engineering  
Electronic laboratory

#### Product features

Hood, low version  
Bolts for single lever  
Straight cable entry  
Versions with / without neck

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

#### Technical Data

Material:	Housing: aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40°C to +100°C, short-term up to +125°C


Product Management	Document: LAPP_PRO341EN.pdf	1 / 3
--------------------	-----------------------------	-------




**EPIC® H-A 10 TG**

05.11.2015

Part number	Article description	M	PG	Neck	Pieces / PU
H-A housing: hood (straight cable entry, bolts for single lever)					
10446000	H-A 10 TG 13,5		13.5	yes	5
10446100	H-A 10 TG 16		16	yes	5
19446000	H-A 10 TG M20	20			5
19446100	H-A 10 TG M25	25			5

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>EPIC® H-A 10 TG</b>	05.11.2015

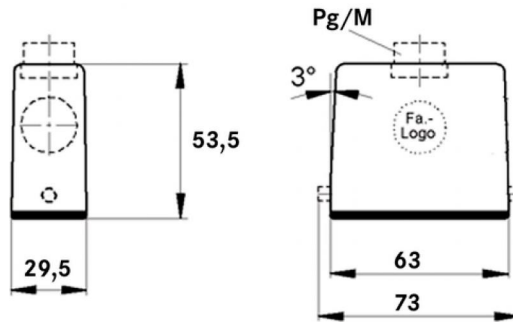

Product Management	Document: LAPP_PRO341EN.pdf	3 / 3
--------------------	-----------------------------	-------