


UL 11028 – 26AWG mPPE Wire



PRODUCT DATA SHEET

Internal wiring.

Design Number 10529
Part Number Table 1
Customer Number N/A

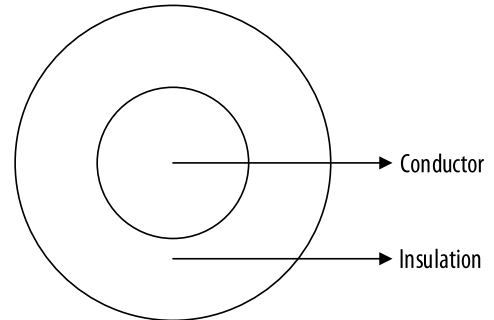

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 26AWG(7/34)
Conductor Diameter: 0.019”(Nom.)
Insulation Material: mPPE
Avg. Thickness: 0.009”(Nom.)
Insulated Diameter: 0.037”(Nom.)
Insulation Color: A variety of colors available

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 600V

Table 1

Part Number	Insulation Color
32154353	Red
32154354	Black
32154355	Blue
32154356	White

SAFETY CHARACTERISTICS

Reference Standards: UL 758, UL 1581, and AWM UL 11028
Approvals: AWM UL 11028
RoHS EU Directive 2011/65/EU (1 & 2 & 3)
REACH Regulation 210

Application: Internal Wiring

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2021/08/24	Initial release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

