
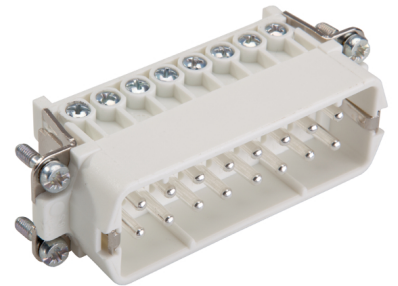


U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>EPIC® H-A 16</b>	05.11.2015

H-A inserts with screw termination up to 2.5 mm<sup>2</sup> wire cross section  
 Slim connector insert for standard application  
 Easy to service screw connection  
 Universal for current and voltage transmission



Industrial machinery and plant engineering



Assembly time



Space requirement

#### Info

Slim standard insert, easy to connect by screw  
 Universal for current and voltage transmission

#### Application range

Machine and equipment manufacturing  
 Control engineering

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

#### Technical Data

Stripping length (mm):	8
Rated voltage (V):	IEC: 250 V UL: 600 V CSA: 600 V
Rated impulse voltage:	4 kV
Rated current (A):	IEC: 16 A UL: 14 A CSA: 16 A
Contact resistance:	1.5 - 4 mohm
Contacts:	Copper alloy, hard silver-plated
Number of contacts:	16 + PE
Termination methods:	Screw termination: 0.5 - 2.5 mm <sup>2</sup> (2.5 mm <sup>2</sup> with conductor end sleeves depending on the crimping profile)
Cycle of mechanical operation:	100
Temperature range:	-40°C to +100°C, short-term up to +125°C
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770
Degree of soiling:	3


Product Management	Document: LAPP_PRO354EN.pdf	1 / 3
--------------------	-----------------------------	-------



Part number	Article description	Contact type	Wire protection	Number of operating contacts	Pieces / PU
H-A 16 screw termination					
10530000	H-A 16 SS	male	yes	1 - 16	5
10531000	H-A 16 BS	female	yes	1 - 16	5
10532000	H-A 16 SS	male		1 - 16	5
10533000	H-A 16 BS	female		1 - 16	5

## EPIC® H-A 16

05.11.2015

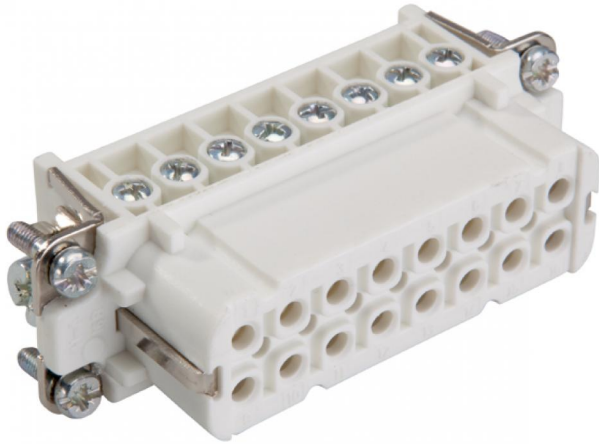

M

F

