


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-A 16 TG	05.11.2015

These connectors are attractive because of their compact housing.
Small and compact, for applications with high number of contacts



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



Info

Non-slip ridges for comfortable disconnecting

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Product features

Hood, low version
Bolts for single lever
Straight cable entry
Versions with / without neck

Remark

Photographs are not to scale and do not represent detailed images of the respective products.


Technical Data


Material:	Housing: powder-coated aluminium alloy, grey Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40°C to +100°C, short-term up to +125°C

Product Management	Document: LAPP_PRO395EN.pdf	1 / 3
--------------------	-----------------------------	-------



Part number	Article description	M	PG	Neck	Pieces / PU
H-A housing: hood (straight cable entry, bolts for single lever)					
10565000	H-A 16 TG 16		16	yes	5
10565300	H-A 16 TG 21		21	yes	5
19565000	H-A 16 TG M20	20			5
19565300	H-A 16 TG M25	25			5

U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-A 16 TG	05.11.2015

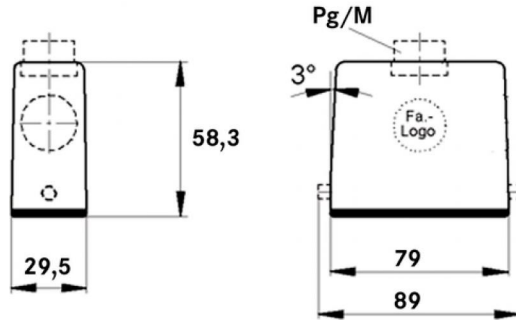

Product Management	Document: LAPP_PRO395EN.pdf	3 / 3
--------------------	-----------------------------	-------