

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
<b>EPIC® H-A 32 TS</b>		05.11.2015

Rugged housings for 2 inserts  
For two inserts of the small H-A, H-D and STA series. Space-saving



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



#### Info

Compact, robust metal housings for double size H-A 32

#### Application range

Machine and equipment manufacturing  
Control engineering

#### Product features

Hood  
Bolts for double lever  
Side cable entry  
Versions with / without neck

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

#### Technical Data

Material:	Housing: aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40°C to +100°C, short-term up to +125°C


Product Management	Document: LAPP_PRO109271EN.pdf	1 / 3
--------------------	--------------------------------	-------




EPIC® H-A 32 TS

05.11.2015

Part number	Article description	M	PG	Neck	Pieces / PU
H-A housing: hood (side cable entry, bolts for double lever)					
10576000	H-A 32 TS 21		21	yes	5
10576200	H-A 32 TS 21		21		5
10577000	H-A 32 TS 29		29	yes	5
19576000	H-A 32 TS M25	25			5
19577000	H-A 32 TS M32	32			5
19577500	H-A 32 TS M40	40			5

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>EPIC® H-A 32 TS</b>	05.11.2015

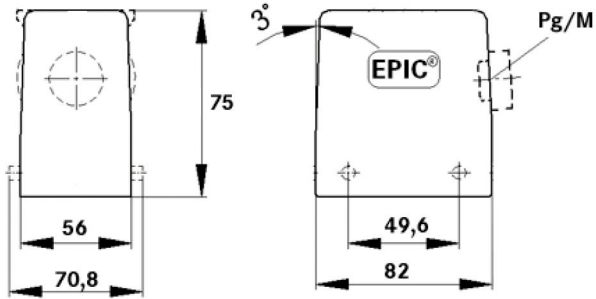

Product Management	Document: LAPP_PRO109271EN.pdf	3 / 3
--------------------	--------------------------------	-------