

UL CMR/2464 20AWG/3C Gray



PRODUCT DATA SHEET

Cable is suitable for installation under NEC (NFPA 70) article 800 guidelines.
Cable is suitable for installation in Canada under Section 60 of CEC, Part I.
Internal wiring or external interconnection of electronic equipment.


Design Number 10658
Part Number 32130992
Customer Number N/A

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 20AWG, 7 Strands Class B
Insulation: Polyvinyl Chloride
Insulation Thickness: 0.016"(Nom.)
Insulation Diameter: 0.067"(Nom.)
Cable Lay Length: 2.00" LHL (Nom.)
Jacket Material: Polyvinyl Chloride
Jacket Thickness: 0.032"(Nom.)
Overall Diameter: 0.208"(Nom.)
Jacket Color: Gray

Print Legend (Footage Markers):

ASCENT E478021 20AWG 3C 75C C(UL)US TYPE CMR SUN RES OR AWM
2464 300V 80C "ROHS COMPLIANT" MADE IN USA

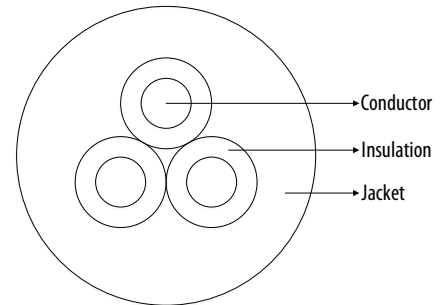

Color Code: Black, White, Red

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 80°C
Operating Voltage: 300V
Weight: 25 Lbs/Mft

SAFETY CHARACTERISTICS

C(UL)US listed as CMR per UL standard 444 and per CSA C22.2 No. 214-17
UL recognized component as AWM 2464 per UL standard 758
Cable meets RoHS 2002/95/EC Directive, RoHS 2 2011/65/EU Directive,
RoHS 3 2015/863/EU Directive
Cable is REACH compliant per Regulation (EC) No 1907/2006 (240) Updated
January 23, 2024

Application: Internal wiring or external interconnection of
electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2022/08/23	Initial Release
01	2024/12/13	FT4 is removed from print legend
Created L. Jian		Approved T.Plockocki

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

