

UL 2661 22AWG/4C Shielded PVC/PVC Cable

PRODUCT DATA SHEET

External interconnection of electronic equipment.

Design Number 11008
Part Number 32143014
Customer Number N/A

CONSTRUCTION


Conductor: Stranded Tinned Copper
Conductor Size: 22AWG(7/30)
Insulation: Premium Grade Polyvinyl Chloride
Insulation Thickness: 0.010"(Nom.)
Insulation Diameter: 0.050"(Nom.)
Separator: Non-Woven Tape, 25% Overlap Min.
Braid: 36AWG Tinned Copper, 85% Coverage
Jacket Material: Clear Polyvinyl Chloride
Jacket Thickness: 0.032"(Nom.)
Overall Diameter: 0.211"(Nom.)
Jacket Color: Clear
Aesthetics: Cable May Have Convolutions

Print Legend:

ASCENT E477982 **  AWM STYLE 2661 105C 300V VW-1 --- c 

AWM I/II A/B 105C 300V FT1 --- ROHS

Note: "***" is Factory code

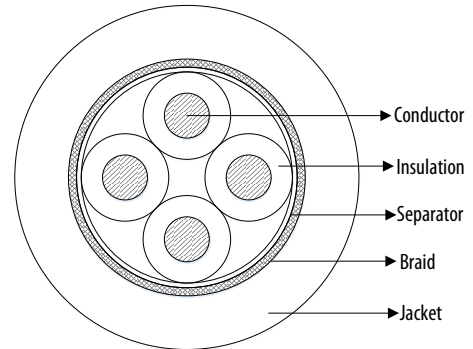

Color Code: Red, Blue, Blue/White, Red/White

PHYSICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V

SAFETY CHARACTERISTICS

UL Rating: AWM 2661
RoHS EU Directive: 2011/65/EU (1&2&3)
REACH Regulation: 223
California Prop: 65

Application: External interconnection of electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2024/08/22	Initial release
Created L. Jian	Approved T.Plochocki	

Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151, USA
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf, Germany
Luton | Unit 11, Humphrys Road, Woodside Industrial Estate, Dunstable, LU5 4TP, UK
Suzhou | B2-2 Weiting Industrial - Workshop A, No. 9 Weixin Road, Suzhou Industrial Park, China

