


**METRIC**

326-4516

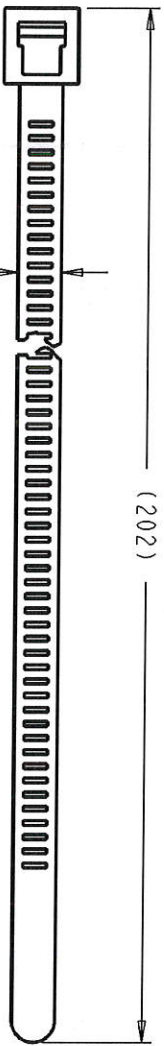

*Handwritten in blue:* Traction T-50R-H-SM-H-10 - Caterpillar Color

NOTE A: REFER TO EDS

NOTE B: 5 MIN, 50MAX BUNDLE DIAMETER, 222.3 N MIN TENSILE STRENGTH

OPERATING TEMP: -80°C TO +150°C  
 MATERIAL: ETHYLENE-TETRAFLUOROETHYLENE  
 TEZEL (E/TFE)

COLOR: BLUE

MATERIAL	APPD PART
B IE2286A	STRAP
HT	
IE2722B	DRAWING
IE0507E	IDENT
IE0198R	LETTERS
IE0013Y	CONFIDENTIALITY
IE0011	INTPR & TOL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm DIMENSIONS W/O TOL ARE BASIC	VERSION TYPE	PRIMARY
	SECONDARY	X
PROD. X OTHER		
<b>Caterpillar: Confidential Yellow</b>		

THIRD ANGLE PROJECTION	SHEET	OF
	DWG CONTROL	A526

**CATERPILLAR**

THE INFORMATION HEREON IS THE PROPERTY OF CATERPILLAR INC. AND/OR ITS  
 SUBSIDIARIES. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE REPRODUCED  
 OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL,  
 INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND  
 RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF CATERPILLAR INC.  
 STRAP - CABLE

326-4516	VER	CHG
		05

4 3 2

*Handwritten signature:* [Signature]