




DESC: 18/1 AWM 1110 105C 300V	DWG NO: FAWM181-011
SCALE: 20x	DATE: 12/10/10
CUSTOMER: ADVANCED ENERGY	DR. BY: DP LANGER
	NWI P/N: FAWM181-011
	CUSTOMER P/N: T.B.D.

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).

Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

ITEM	SPECS.
A.	18 GAUGE 16x30TC BUNCHED
B.	15 MILS SR-PVC INSULATION PER UL AWM 10335 13 MILS MIN. SEMI-RIGID PVC INSULATION
C.	15 MILS TUBED PVC JACKET 105C 600V 13 MILS MIN. PVC JACKET BLACK JACKET UL AND CSA RECOGNIZED ROHS COMPLIANT MATERIALS USED

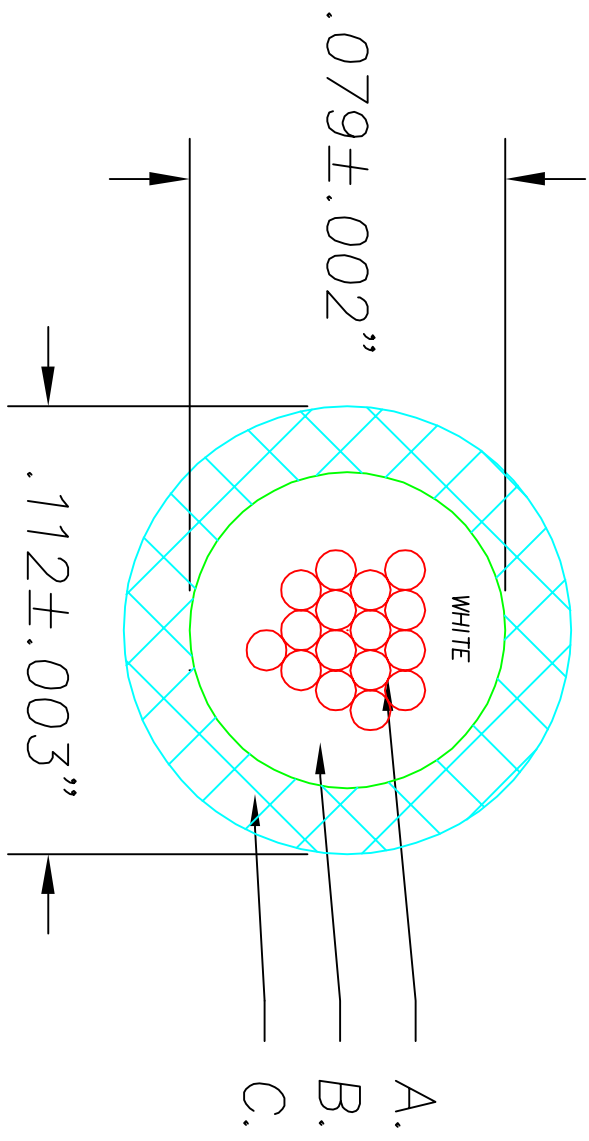

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
TUBED JACKET MUST MAINTAIN 2-5 LB TIGHTNESS TO INSULATION WHEN STRIPPING 3 INCHES.

BLACK INK PRINT LEGEND ON INSULATION TO READ:
RU AWM 105C 600V E54661 CSA AWM I A/B 105C 600V FT1 LL54185

WHITE INK PRINT LEGEND ON OUTER JACKET TO READ:
RU AWM 1110 105C 300V E54661 CSA AWM I/II A/B 105C 300V FT1 LL54185

INITIAL RELEASE	REVISION RECORD
A	12/10/10
DPL	
REV	REV DATE
APR 1	APR 2
QA R	