


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-D 64 machined	05.11.2015

multi-pole inserts for machined crimp contacts
 Inserts of the connector series H-D are designed for applications in which a high number of contacts are required.



Industrial machinery and plant engineering

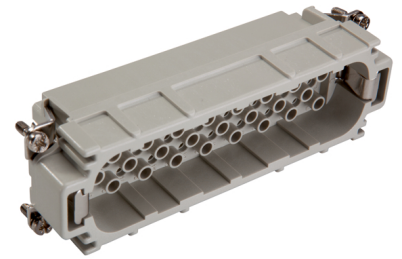

Space requirement



Robust

Application range

Plant engineering
 Light & sound technology

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Rated voltage (V):	IEC: 250 V UL: 250 V
Rated impulse voltage:	2.5 kV
Rated current (A):	IEC: 10 A UL: 10 A
Contact resistance:	< 2 mOhm
Contacts:	Copper alloy, hard silver/gold-plated
Number of contacts:	64 + PE
Termination methods:	Crimp termination: 0.14 - 2.5 mm ²
Cycle of mechanical operation:	100
Temperature range:	-40°C to +100°C, short-term up to +125°C
VDE-tested:	UL-tested: UL File Number: E75770
Degree of soiling:	3

Product Management	Document: LAPP_PRO122675EN.pdf	1 / 3
--------------------	--------------------------------	-------





EPIC® H-D 64 machined

05.11.2015

Part number	Article description	Contact type	Article designation	Number of operating contacts	Pieces / PU
H-D 64 crimp termination					
11272000	H-D 64 SCM	male	machined	1 - 64	10
11273000	H-D 64 BCM	female	machined	1 - 64	10

U.I. Lapp GmbH	PRODUCT INFORMATION	
EPIC® H-D 64 machined		05.11.2015

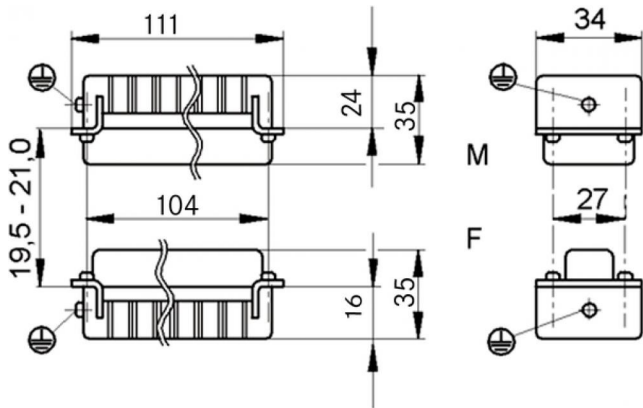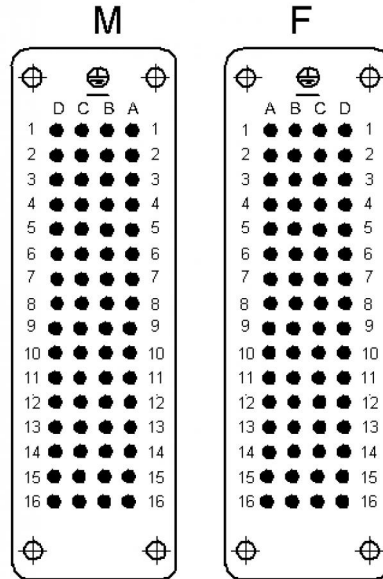

Product Management	Document: LAPP_PRO122675EN.pdf	3 / 3
--------------------	--------------------------------	-------