



Right-Angle Shapes, VG style


Helashrink 1100 Series, with rib, low profile, high ratio

Features and Benefits


- Use in applications of partially loaded connectors with small cable diameters
- Tail design for easy orientation prior to cooling
- Strain relief for connector cable




1135-1-G Supplied and recovered.



a: Expanded form (supplied)

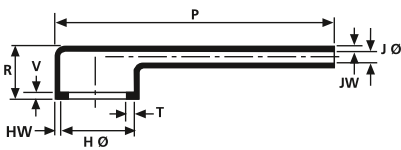

b: Fully recovered form (after heating)



Fully recovered form (after heating)

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	JO ± 10%	V max	T ± 20%	Designation as per VG-Norm	Article-No.
1133-1-G	19.0	13.0	6.0	2.0	44.0	16.3	1.5	1.1	21.8	3.3	1.0	VG95343T06F011A	411-33180
1134-1-G	26.0	19.0	7.5	2.5	67.0	18.0	1.8	1.1	29.2	3.3	1.0	VG95343T18H001A	411-34180
1135-1-G	34.0	26.0	9.5	3.0	81.0	18.8	1.8	1.1	35.3	3.3	1.0	VG95343T06F013A	411-35180
1136-1-G	43.5	34.0	11.5	3.5	116.0	21.3	1.8	1.1	47.0	3.3	1.7	VG95343T06F014A	411-36180

All dimensions in mm. Subject to technical changes.



For product specific approvals and specifications please refer to the Appendix.