

Nylon Liquid Tight Strain Relief Fittings

Multi-Hole - Metric Threads



| Part Numbers | | Thread Type & Size | Dimensions in Inches (mm) | | | | |
|---------------------------------|-----------|--------------------|---------------------------|-------------------|---------------|------------------------------|---------------|
| -40°F to 212°F (-40°C to 100°C) | | | No. of Holes | Diameter of Holes | | Part Numbers of Inserts Only | |
| Black | Gray | mm | | Inches | | | |
| CD12MP-BK | CD12MP-GY | M12 X 1.5 | Solid Insert | | 1.089.0799.19 | | |
| CD16M1-BK | CD16M1-GY | M16 X 1.5 | 4 | 1.4 | .06 | 1.089.0900.19 | |
| CD16M2-BK | CD16M2-GY | | 2 | 3.0 | .12 | 1.089.0901.19 | |
| CD16M3-BK | CD16M3-GY | | 5 | 1.6 | .06 | 1.089.0902.19 | |
| CD16M4-BK | CD16M4-GY | | 2 | 1.7 | .07 | 1.089.0903.19 | |
| CD16M5-BK | CD16M5-GY | | 10 | 1.4 | .06 | 1.089.0904.19 | |
| CD16M6-BK | CD16M6-GY | | 6 | 1.4 | .06 | 1.089.0905.19 | |
| CD16M7-BK | CD16M7-GY | | 3 | 1.7 | .07 | 1.089.0906.19 | |
| CD16M8-BK | CD16M8-GY | | 4 | 1.7 | .07 | 1.089.0907.19 | |
| CD16M9-BK | CD16M9-GY | | 4 | 2.3 | .09 | 1.089.0908.19 | |
| CD16MP-BK | CD16MP-GY | | Solid Insert | | 1.089.0999.19 | | |
| CD17M1-BK | CD17M1-GY | | M16 X 1.5 (Enlarged) | 2 | 3.0 | .12 | 1.089.1100.19 |
| CD17M2-BK | CD17M2-GY | | | 3 | 3.0 | .12 | 1.089.1101.19 |
| CD17M3-BK | CD17M3-GY | 2 | | 4.0 | .16 | 1.089.1102.19 | |
| CD17M4-BK | CD17M4-GY | 3 | | 1.5 | .06 | 1.089.1103.19 | |
| CD17M5-BK | CD17M5-GY | 4 | | 2.8 | .11 | 1.089.1104.19 | |
| CD17MP-BK | CD17MP-GY | Solid Insert | | 1.089.1199.19 | | | |
| CD20M1-BK | CD20M1-GY | M20 X 1.5 | 3 | 2.0 | .08 | 1.089.1300.19 | |
| CD20M2-BK | CD20M2-GY | | 6 | 3.0 | .12 | 1.089.1301.19 | |
| CD20M3-BK | CD20M3-GY | | 3 | 4.0 | .16 | 1.089.1302.19 | |
| CD20M4-BK | CD20M4-GY | | 2 | 5.0 | .20 | 1.089.1303.19 | |
| CD20M5-BK | CD20M5-GY | | 3 | 3.0 | .12 | 1.089.1304.19 | |
| CD20M6-BK | CD20M6-GY | | 2 | 5.2 | .20 | 1.089.1305.19 | |
| CD20M7-BK | CD20M7-GY | | 2 | 3.8 | .15 | 1.089.1306.19 | |
| CD20M8-BK | CD20M8-GY | | 2 | 4.2 | .17 | 1.089.1307.19 | |
| CD20M9-BK | CD20M9-GY | | 2 | 2.5 | .10 | 1.089.1308.19 | |
| CD20MP-BK | CD20MP-GY | | Solid Insert | | 1.089.1399.19 | | |
| CD22M1-BK | CD22M1-GY | | M20 X 1.5 (Enlarged) | 3 | 3.0 | .12 | 1.089.1600.19 |
| CD22M2-BK | CD22M2-GY | | | 3 | 4.0 | .16 | 1.089.1601.19 |
| CD22M3-BK | CD22M3-GY | 4 | | 4.0 | .16 | 1.089.1602.19 | |
| CD22M4-BK | CD22M4-GY | 5 | | 4.0 | .16 | 1.089.1603.19 | |
| CD22M5-BK | CD22M5-GY | 6 | | 4.0 | .16 | 1.089.1604.19 | |
| CD22M6-BK | CD22M6-GY | 2 | | 6.0 | .24 | 1.089.1605.19 | |
| CD22M7-BK | CD22M7-GY | 3 | | 5.6 | .22 | 1.089.1606.19 | |
| CD22M8-BK | CD22M8-GY | 6 | | 3.0 | .12 | 1.089.1607.19 | |
| CD22M9-BK | CD22M9-GY | *4 | | 3.0 | .12 | *1.089.1610.19 | |
| CD22M0-BK | CD22M0-GY | 6 | | 3.8 | .15 | 1.089.1909.19 | |
| CD22MP-BK | CD22MP-GY | Solid Insert | | 1.089.1699.19 | | | |

*Note: This Insert has slotted holes.

*Note: UL f1 (746C) rating applies to Black Nylon Fittings only.

Fittings with Multi-Hole Inserts are also available with a Flex Nut.

To order, substitute "CF" for "CD" (e.g. CD16M1-BK becomes CF16M1-BK).

"BP" (Billet Plugs) available upon request.

Custom Solutions for terminated cable!


For Strain Relief Specifications and Dimensions refer to page 5.
For Material Specifications and Approval Information refer to page 52.

| Part Numbers | | Thread Type & Size | Dimensions in Inches (mm) | | | | |
|---------------------------------|-----------|--------------------|---------------------------|-------------------|---------------|------------------------------|---------------|
| -40°F to 212°F (-40°C to 100°C) | | | No. of Holes | Diameter of Holes | | Part Numbers of Inserts Only | |
| Black | Gray | mm | | Inches | | | |
| CD25M1-BK | CD25M1-GY | M25 X 1.5 | 4 | 6.0 | .24 | 1.089.2100.19 | |
| CD25M2-BK | CD25M2-GY | | 3 | 7.0 | .28 | 1.089.2101.19 | |
| CD25M3-BK | CD25M3-GY | | 2 | 8.0 | .31 | 1.089.2102.19 | |
| CD25M4-BK | CD25M4-GY | | 4 | 5.0 | .20 | 1.089.2103.19 | |
| CD25M5-BK | CD25M5-GY | | 1 | 8.0 | .31 | 1.089.2104.19 | |
| CD25M6-BK | CD25M6-GY | | 4 | 5.2 | .20 | 1.089.2105.19 | |
| CD25M7-BK | CD25M7-GY | | 3 | 5.2 | .20 | 1.089.2106.19 | |
| CD25M8-BK | CD25M8-GY | | 4/1 | 5.2/3.7 | .20/.15 | 1.089.2107.19 | |
| CD25M9-BK | CD25M9-GY | | 2 | 7.4 | .29 | 1.089.2108.19 | |
| CD25MP-BK | CD25MP-GY | | Solid Insert | | 1.089.2199.19 | | |
| CD32M1-BK | CD32M1-GY | | M32 X 1.5 | 6 | 6.5 | .26 | 1.089.2900.19 |
| CD32M2-BK | CD32M2-GY | | | 4 | 9.0 | .35 | 1.089.2901.19 |
| CD32M3-BK | CD32M3-GY | 4 | | 9.5 | .37 | 1.089.2902.19 | |
| CD32MP-BK | CD32MP-GY | Solid Insert | | 1.089.2999.19 | | | |
| CD40M1-BK | CD40M1-GY | M40 X 1.5 | 5 | 9.0 | .35 | 1.089.3600.19 | |
| CD40M2-BK | CD40M2-GY | | 7 | 9.0 | .35 | 1.089.3601.19 | |
| CD40M3-BK | CD40M3-GY | | 6 | 8.0 | .31 | 1.089.3602.19 | |
| CD40M4-BK | CD40M4-GY | | 2 | 15.0 | .59 | 1.089.3603.19 | |
| CD40MP-BK | CD40MP-GY | | Solid Insert | | 1.089.3699.19 | | |
| CD50M1-BK | CD50M1-GY | | M50 X 1.5 | 3 | 14.0 | .55 | 1.089.4203.19 |
| CD50MP-BK | CD50MP-GY | Solid Insert | | 1.089.4299.19 | | | |
| CD63M1-BK | CD63M1-GY | M63 X 1.5 | 8 | 10.0 | .39 | 1.089.4800.19 | |
| CD63M2-BK | CD63M2-GY | | 6 | 12.0 | .47 | 1.089.4801.19 | |
| CD63M3-BK | CD63M3-GY | | 3 | 18.0 | .71 | 1.089.4802.19 | |
| CD63MP-BK | CD63MP-GY | | Solid Insert | | 1.089.4899.19 | | |

RJ45 Solution

| Part Numbers | | Thread Type & Size | Dimensions in Inches (mm) | | |
|---------------------------------|-----------|--------------------|---------------------------|-----|------------------------------|
| -40°F to 212°F (-40°C to 100°C) | | | Cable Diameter | | Part Numbers of Inserts Only |
| Black | Gray | mm | Inches | | |
| CD22MK-BK | CD22MK-GY | M20 (Enlarged) | 5.7 | .23 | 1.089.16C-06 |
| CD22MJ-BK | CD22MJ-GY | | 6.9 | .27 | 1.089.16C-07 |

*Note: RJ45 Solution has no approval ratings. Reference Diagram below.

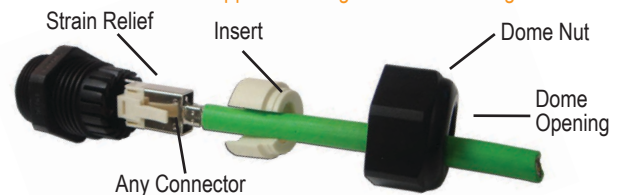

Dome Fittings also available with the following approvals:



www.SealconEX.com

Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.