

NEMA HP-3 TYPES E, EE, ET

Replaces M16878/4,/5,/6,/23,/25,/27

Construction

Stranded or solid silver or nickel plated copper

Extruded Polytetrafluoroethylene (PTFE)

Ratings/Approvals

SPC 200° C NPC 260° C

NEMA HP-3 has no requirement for the wire to be printed.

XE 18awg & smaller dual rated to UL1213

XEE 18awg & smaller dual rated to UL1180


	Type E		Type EE		Type ET		DC Resistance
	M16878/4		M16878/5		M16878/6		
Voltage Rating	600		1000		250		
AWG/Stranding	Mils/OD	lbs/mft	Mils/OD	lbs/mft	Mils/OD	lbs/mft	Ohms/mft
30 1/30	10/.030"	1	15/.040"	1	6/.022"	1	106.0
30 7/38	10/.032"	1	15/.042"	1	6/.024"	1	100.0
28 1/28	10/.033"	2	15/.043"	2	6/.025"	1	66.7
28 7/36	10/.035"	2	15/.045"	2	6/.027"	1	63.6
28 19/40	10/.035"	2	15/.045"	2	6/.027"	1	63.1
26 1/26	10/.036"	2	15/.046"	2	6/.028"	2	41.9
26 7/34	10/.039"	2	15/.049"	2	6/.031"	2	39.7
26 19/38	10/.039"	2	15/.049"	2	6/.031"	2	37.3
24 1/24	10/.040"	3	15/.050"	3	6/.032"	3	26.2
24 7/32	10/.044"	3	15/.054"	3	6/.036"	3	24.5
24 19/36	10/.045"	3	15/.055"	3	6/.036"	3	23.6
22 1/22	10/.045"	4	15/.055"	4	6/.038"	3	16.5
22 7/30	10/.050"	4	15/.060"	4	6/.042"	3	15.6
22 19/34	10/.051"	4	15/.061"	5	6/.042"	4	14.8
20 1/20	10/.052"	5	15/.062"	6	6/.044"	5	10.3
20 7/28	10/.058"	5	15/.068"	6	6/.050"	5	9.8
20 19/32	10/.058"	6	15/.068"	7	6/.050"	5	9.1
18 7/26	10/.069"	8	15/.079"	9	-	-	6.2
18 19/30	10/.069"	8	15/.079"	9	-	-	5.8
16 19/29	13/.080"	10	18/.089"	11	-	-	4.5
14 19/27	13/.095"	15	18/.106"	17	-	-	2.9
12 19/25	15/.114"	23	21/.125"	24	-	-	1.8
10 37/26	13/.134"	35	19/.145"	35	-	-	1.2
8 133/29	-	-	24/.209"	68	-	-	0.7
6 133/27	-	-	28/.263"	107	-	-	-

Additional constructions available - check with the factory for details

All figures referenced are nominal

NEMA HP3/HP4 REFERENCE GUIDE

replaces M16878

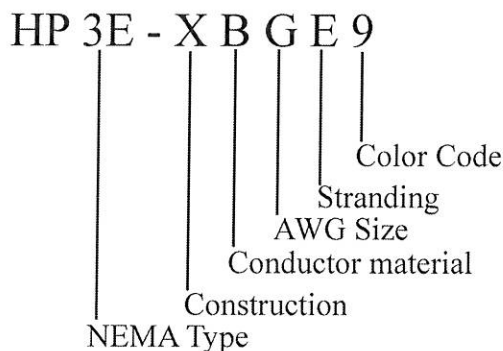

Construction

X = Extruded
W = Wrapped (HP3 only)

AWG Size

B	30
C	28
D	26
E	24
F	22
G	20
H	18
J	16
K	14
L	12
M	10
N	8
P	6
R	4
S	2
T	1
U	1/0
W	2/0
Y	3/0
Z	4/0

NEMA Type

HP3	Dielectric
E	PTFE
EE	PTFE
ET	PTFE
HP4	Dielectric
K	FEP
KK	FEP
KT	FEP

Conductor

B	Silver plated copper
C	Nickel plated copper
D	Silver plated high-strength alloy
E	Nickel plated high-strength alloy
F	Silver plated copper clad steel
G	Nickel plated copper clad steel
H	Tin plated copper (HP4 only)

Stranding

A	1
B	7
E	19
G	37
L	133
P	665
R	817
S	1045
T	1330
V	1665
W	2109

Color Code

0	Black
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Violet
8	Gray
9	White

*Constructions listed are those currently manufactured by Harbour Industries



APPLIANCE WIRING MATERIAL

Subj.758 Section 1 Page 1213

Issued:1960-02-10

Revised:2012-03-14

Style 1213 Single Conductor with Extruded Insulation

Rating 105 deg C, Voltage not specified, Horizontal
flame, 60 deg C Oil.

Conductor 36 AWG - 12 AWG, solid or stranded round.

Insulation Extruded PTFE, 8 mils minimum average
thickness, 7 mils minimum thickness at any
point.

Standard Appliance Wiring Material UL 758.

Marking General.

Use Internal wiring where not subjected to
mechanical abuse, Oil Resistant 60 deg C.

UL and the UL Logo are trademarks of UL LLC © 2016