



Automotive cable screened

2 x 0.75 mm² / Radox 155S / Radox 155

General Properties:


Excellent resistance to high and low temperature, ozone, UV and weathering resistance, resistant to pressure at high temperature, motor oil, fuels and hydrolysis, flame retardant, high abrasion resistant, solder iron resistant, easy to strip and process, according to ISO 6722 class D, ISO 14572.

Complies with EU-directive 2000/53/EG on end of life vehicles. It is free from lead, mercury, cadmium and chrome VI.

Application:

Low voltage cable, for use in road vehicle applications.

CAUTION Special care shall be taken for cables used with voltages above 60 VDC to protect them from mechanical stress in order to avoid shock hazard (ISO 6722 : 2006).

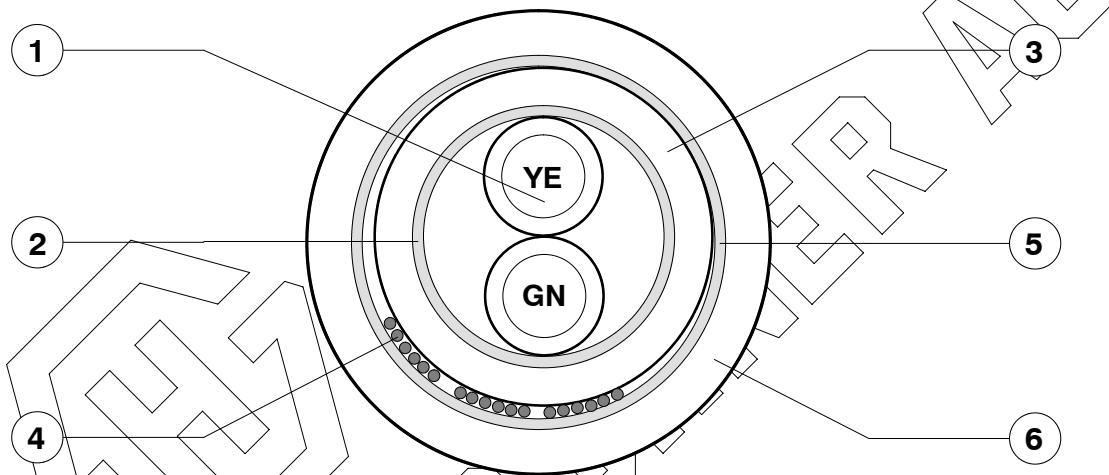

- | | | |
|--|---|---|
| <p>1. 2 Cores 0.75 mm²
Type Radox 155S</p> <p>2. Wrapping</p> <p>3. Sheath</p> <p>4. Drain wire</p> <p>5. Screen</p> <p>6. Sheath</p> | <p>Conductor: stranded bare copper
Insulation: Radox 155S
Colours: yellow, green</p> <p>Plastic tape (Polyester)</p> <p>Radox 155, colour: nature</p> <p>Tin plated copper</p> <p>Plastic laminated Al - tape</p> <p>Radox 155, colour: black</p> | <p>19 x 0.23 mm D
D: 3.40 ± 0.10 mm</p> <p>D: 9.2 mm</p> <p>18 x 0.23 mm D</p> <p>D: 9.5 mm</p> <p>D: 10.7 ± 0.2 mm</p> |
|--|---|---|

Technical data: (acc. to SAEJ1939-11 / rev. Oct. 1999)

Conductor resistance at 20 °C	≤ 25.0	Ω / km
Voltage rating	60	V
Test voltage, 50 Hz, 1 min.	2'000	V
Characteristic Impedance	120 ± 12	Ω
Capacitance	core / core	≤ 75 pF / m
	core / screen	≤ 110 pF / m
Temperature range (3'000 h)	- 40 ... + 150	°C
Min. bending radius	fixed	4 x cable D
	flexing	6 x cable D
Cable weight per 100 m	approx. 11.9	kg

Copyright 2003 Huber + Suhner AG. This document may not be copied nor be passed on to third parties without our written permission.
Uncontrolled copy when printed [will not be updated].

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER
Wire+Cable Division
CH-8330 Pfäffikon
 +41 (0)1 952 22 11
 +41 (0)1 952 26 40
www.hubersuhner.com