
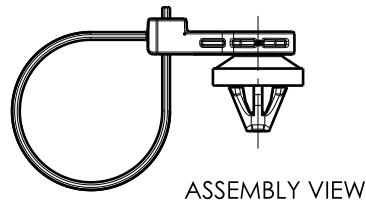



Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.3	Design Release	B	SEE ECN# 012930	KVH	12/4/14	EJH	12/4/14

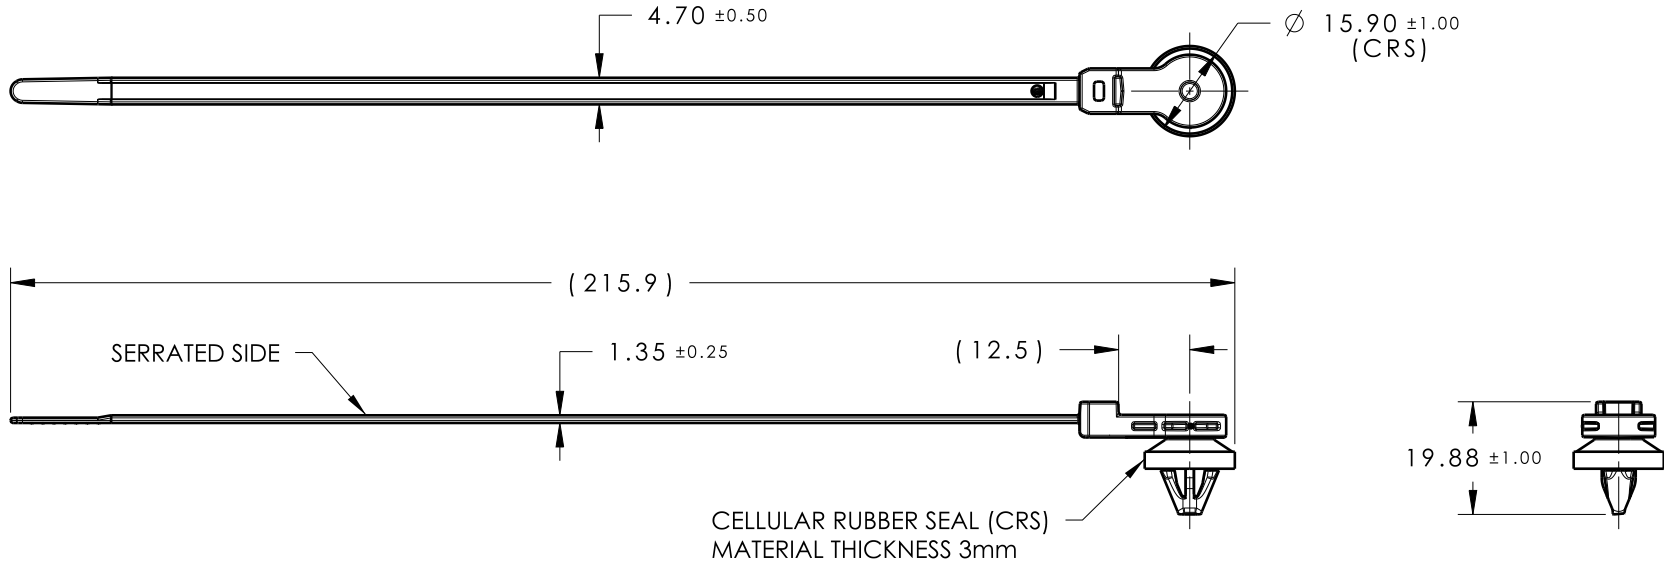

- REFERENCE:
 PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
1. ARROWHEAD PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN THE APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 2.3mm.
 2. ARROWHEAD PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN THE APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 2.3mm.
 3. SHEET METAL THICKNESS RANGE: 1.80mm - 2.80mm
 4. APPLICABLE HOLE SIZE:
 - A. 6.5mm +/- 0.4
 - B. 6.35mm +/- 0.25 HEX
 5. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
 6. BUNDLE RANGE: 2.0mm TO 50mm

Material PA66HIRHS COLOR: BLACK	Units millimeters Tolerance defined on each dimension	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	KVH	9/19/14	Article/Type-No	T50ROSFT6.35SO12.5B-MS	Scale	3:4
			Approved	EJH	12/4/14	Title	T50ROS WITH 12.5mm OFFSET AND 6.35mm HEX HOLE ARROWHEAD (B-SERIES) AND CELLULAR RUBBER SEAL	Project Number	14-0966
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
						14-0966-101-CSU		Sheet	1/1