


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
6/13/2012	A		SPECIFICATION CREATED

Parent Number: F25089-

Description: 250 MCM 19x129/30 BC MTW or THHW or
AWM 1284/1339 or 10269 CT USE AWM I A/B **DIAMETER:** 0.835
TOLERANCE ±: 0.020

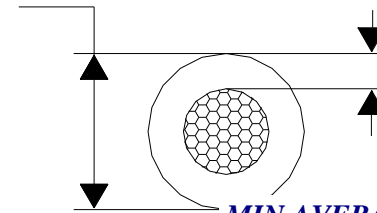

MIN AVERAGE WALL: 0.095

MINIMUM WALL: 0.086

Stranding: 19x129/30 BC Unilay

Style: UL: MTW or THHW or AWM 1284/1339 or 10269 CT USE
CSA: AWM I A/B

Insulation: PVC

Print Legend: 250 MCM (127mm²) E137733 (PLANT ID CODE) (UL) MTW OR THHW FOR CT USE OR AWM 1284/1339 600V OR 10269 1000V OIL RES I
SUN RES VW-1 -- 156016 CSA AWM I A/B 105C 600V FT1

Voltage: 600V, AWM 10269 = 1,000V

Temperature: 105C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

