



# Heyco® Original Strain Relief Bushings


## Right Angle for Round Cables

- Provides the same protection for your power supply cable as the straight-thru type AND...
- Exits the cable flush against the panel, saving space and directing the cable parallel to the panel.
- Overcomes space limitations and acts as a back or bottom bumper.
- See page 4-21 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.
- Consult Heyco for other wire types and sizes.
- See pages 4-23 & 4-24 for SR assembly tools.


UL Type	WILL FIT THESE CABLES		PANEL DIMENSIONS						PART NO. Black	DESC	PART DIMENSIONS				Mounting Hole Plug PART NO.	
	AWG/ Conductors	Approximate Size	A Mounting Hole Dia.		B To Prevent Rotation		Finished Fit Panel Thickness*				C HEAD LENGTH		D BODY LENGTH			
		in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	in. mm.				
SV & SVT	18/2	.250	6,4	.500	12,7	.450	11,4	.100	2,5	1374	SR 15-1	.390	9,9	.687	17,5	2491
	18/3	.265	6,7	.500-.515	12,7-13,1											
HPD	18/2	.270	6,9	.500	12,7	.450	11,4	.100	2,5	1374	SR 15-1	.390	9,9	.687	17,5	2491
	16/2	.290	7,4	.500-.515	12,7-13,1											
SJ, SJO & SJT	18/2	.300	7,6	.625	15,9	.550	14,0	.062	1,6	1323	SR 10N-2	.562	14,3	.968	24,6	2497
	16/2	.325	8,3													
	18/3	.330	8,4													
SJ	16/3	.330	8,4	.625	15,9	.550	14,0	.125	3,2	1320	SR 10-2	.562	14,3	.968	24,6	2497
Same as SR 10N-2 above except																
SJ, SJO & SJT	16/2	.325	8,3	.625	15,9	.550	14,0	.125	3,2	1327	SR 11-2	.562	14,3	.968	24,6	2497
	18/3	.330	8,4													
	16/3	.335	9,0													
Same as SR 11-2 above except			.750	19,0	.660	16,8	.125	3,2	1397	SR 17-2	.640	16,3	1.093	27,7	2503	
SJT	18/4	.360														9,1
SJT & SJTO	14/3	.370	9,4	.750	19,0	.660	16,8	.125	3,2	1397	SR 17-2	.640	16,3	1.093	27,7	2503
SJ & ST	18/2	.390	9,9													
	18/3	.405	10,3													
	16/2	.405	10,3													
	16/3	.430	10,9	.750-.781	19,0-19,8											

Standard color black. Consult Heyco for white and other colors.

\*Maximum Panel Thickness. Part has additional clearance. Consult Heyco for your Custom Finished Fit Panel Thickness.



MOUNTING HOLES

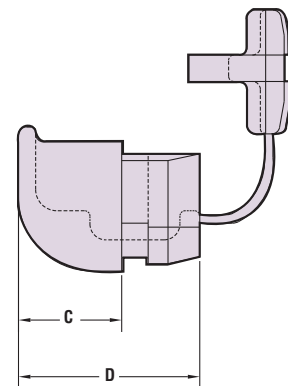

Quick Specs

<b>Material</b>	Nylon 6/6
<b>Certifications</b>	UL Recognized under the Component Program of Underwriters' Laboratories File E15331
	CSA Certified by the Canadian Standards Association File 8919
<b>Flammability Rating</b>	94V-2
<b>Material Temperature Index</b>	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)