



DESC: 14/4 AWM 2463 80°C 600V CONSTRUCTION A

DWG NO: 1404A001

SCALE: 20x

DATE: 10/17/97

DR. BY: DP LANGER

NW P/N: FAWM144-001

CUSTOMER: INDUSTRIAL ELECTRIC


CUSTOMER P/N: 110165

ITEM SPECS.

- A. 14 GAUGE 41x30TC BUNCHED
NOM. O.D. .077±.003"
- B. 30 MILS PVC INSULATION 105°C 600V
27 MILS MIN. PVC INSULATION
NOM. O.D. .135±.002" AWM STYLE 1015
- C. POLY FILLER
- D. CLEAR MYLAR WRAP
25% MIN. OVERLAP 100% COVERAGE
- E. 90% MIN. TC BRAID SHIELD
38 GAUGE SINGLE ENDS
- F. TISSUE PAPER SEPARATOR
- G. 32 MILS PRESSURED PVC JACKET 80°C 600V
25 MILS MIN. PVC JACKET BLACK JACKET
CABLE IS UL AND CSA APPROVED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

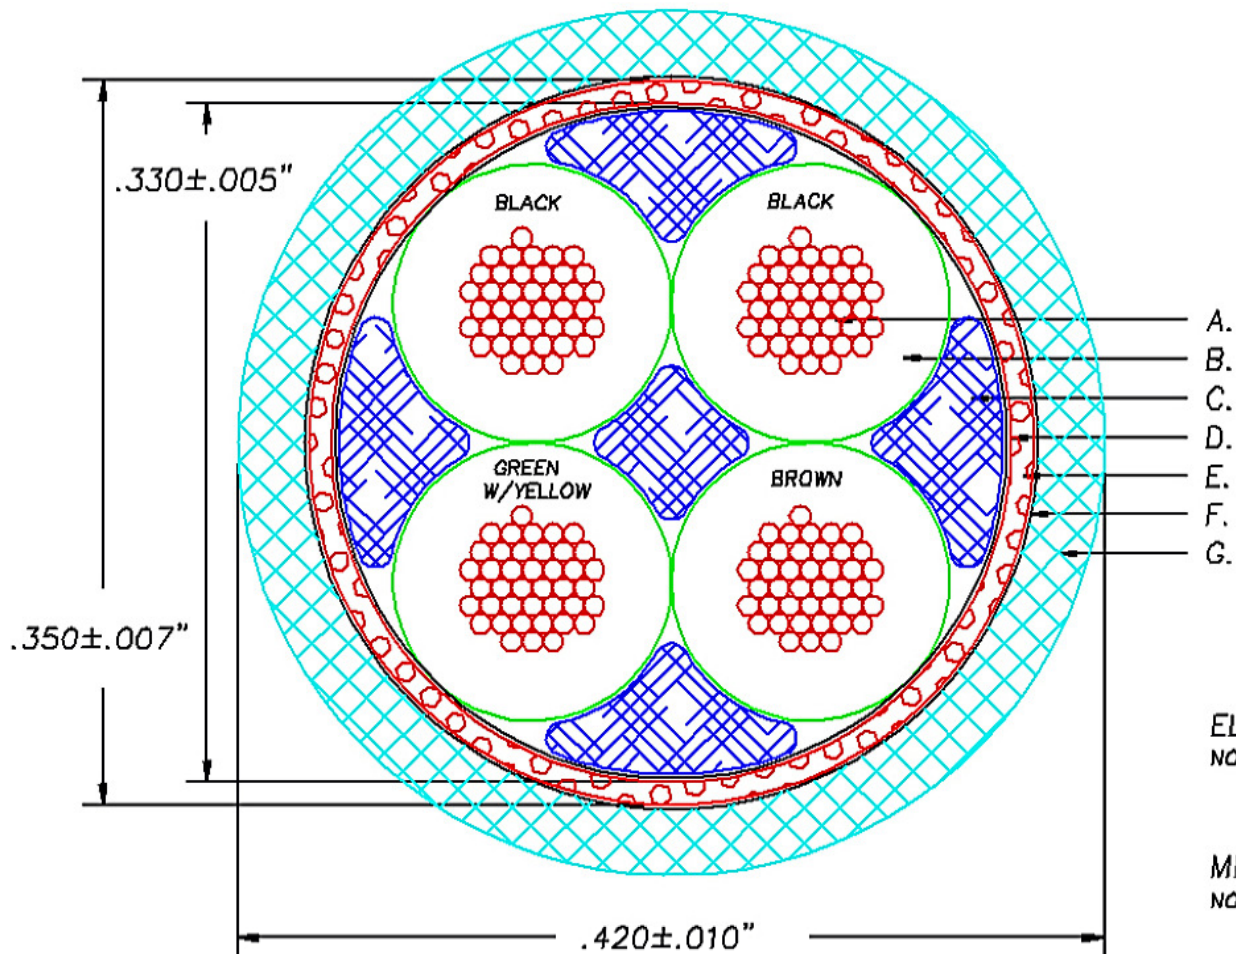

- A.
- B.
- C.
- D.
- E.
- F.
- G.

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

| | | | | |
|---------------------------|-----|----------|----------|----------|
| RELEASED TO MANUFACTURING | A | 10/21/99 | DPL | PKD |
| REVISION RECORD | REV | REV DATE | APPROVAL | APPROVAL |