



Elongated thread is recommended where the Strain Relief has to pass through a thick wall or the application just needs the extra thread length.



Suggested Clearance Hole for Non-Threaded Mounting

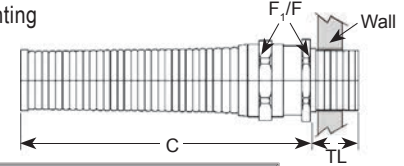

Part Numbers		Cable Range	Thread Type & Size	Dimensions in Inches (mm)				
-40°F to 212°F (-40°C to 100°C)				A	B	C	TL	F ₁ /F
Dome Fittings	Flex Fittings	Inches (mm)	See page 56 for thread specs	Clearance Hole +.01" (+.25 mm)	Body Length (Dome)	Body Length (Flex)	Thread Length	Wrench Flats
Elongated								
CD07CA-BR	CF07CA-BR	.12 - .26 (3 - 6.5)	PG 7	.49 (12.5)	.75 (19)	2.17 (55)	.39 (10)	.55 (14)
CD07CR-BR	CF07CR-BR	.08 - .20 (2 - 5)						
CD09CA-BR	CF09CA-BR	.16 - .31 (4 - 8)	PG 9	.60 (15.2)	.83 (21)	2.60 (66)	.39 (10)	.67 (17)
CD09CR-BR	CF09CR-BR	.08 - .24 (2 - 6)						
CD11CA-BR	CF11CA-BR	.20 - .39 (5 - 10)	PG 11	.73 (18.5)	.87 (22)	3.03 (77)	.39 (10)	.79 (20)
CD11CR-BR	CF11CR-BR	.12 - .28 (3 - 7)						
CD13CA-BR	CF13CA-BR	.24 - .47 (6 - 12)	PG 13 / 13.5	.80 (20.3)	.94 (24)	3.46 (88)	.39 (10)	.87 (22)
CD13CR-BR	CF13CR-BR	.20 - .35 (5 - 9)						
CD16CA-BR	CF16CA-BR	.39 - .55 (10 - 14)	PG 16	.89 (22.5)	.91 (23)	3.86 (98)	.39 (10)	.94 (24)
CD16CR-BR	CF16CR-BR	.28 - .47 (7-12)						
CD21CA-BR	CF21CA-BR	.51 - .71 (13 - 18)	PG 21	1.12 (28.4)	.94 (24)	4.37 (111)	.47 (12)	1.18 (30)
CD21CR-BR	CF21CR-BR	.35 - .63 (9 - 16)						
CD29CA-BR	-	.71 - .98 (18 - 25)	PG 29	1.47 (37.3)	1.14 (29)	-	.47 (12)	1.57 (40)
CD29CR-BR	-	.51 - .79 (13 - 20)						
CD36CA-BR	-	.87 - 1.26 (22 - 32)	PG 36	1.85 (47)	1.38 (35)	-	.59 (15)	1.97 (50)
CD36CR-BR	-	.79 - 1.02 (20 - 26)						
CD42CA-BR	-	1.26 - 1.50 (32 - 38)	PG 42	2.13 (54.1)	1.46 (37)	-	.59 (15)	2.24 (57)
CD42CR-BR	-	.98 - 1.22 (25 - 31)						
CD48CA-BR	-	1.46 - 1.73 (37 - 44)	PG 48	2.34 (59.4)	1.50 (38)	-	.59 (15)	2.52 (64)
CD48CR-BR	-	1.14 - 1.38 (29 - 35)						
CD12DA-BR	CF12DA-BR	.12 - .26 (3 - 6.5)	M12 X 1.5	.47 (12)	.75 (19)	2.17 (55)	.39 (10)	.55 (14)
CD12DR-BR	CF12DR-BR	.08 - .20 (2 - 5)	M16 X 1.5	.63 (16)	.83 (21)	2.60 (66)	.39 (10)	.67 (17) Dome
CD16DA-BR	CF16DA-BR	.16 - .31 (4 - 8)						.75 (19) Flex
CD16DR-BR	CF16DR-BR	.08 - .24 (2 - 6)	M16 X 1.5	.63 (16)	.87 (22)	3.03 (77)	.39 (10)	.79 (20)
CD17DA-BR	CF17DA-BR	.20 - .39 (5 - 10)						
CD17DR-BR	CF17DR-BR	.12 - .28 (3 - 7)	M20 X 1.5	.79 (20)	.91 (23)	3.46 (88)	.39 (10)	.87 (22)
CD20DA-BR	CF20DA-BR	.24 - .47 (6 - 12)						
CD20DR-BR	CF20DR-BR	.20 - .35 (5 - 9)	M20 X 1.5	.79 (20)	.94 (24)	3.86 (98)	.39 (10)	.94 (24)
CD22DA-BR	CF22DA-BR	.39 - .55 (10 - 14)						
CD22DR-BR	CF22DR-BR	.28 - .47 (7-12)	M25 X 1.5	.98 (25)	1.02 (25)	4.37 (111)	.47 (12)	1.18 (30)
CD25DA-BR	CF25DA-BR	.51 - .71 (13 - 18)						
CD25DR-BR	CF25DR-BR	.35 - .63 (9 - 16)	M32 X 1.5	1.26 (32)	1.22 (31)	-	.47 (12)	1.57 (40)
CD32DA-BR	-	.71 - .98 (18 - 25)						
CD32DR-BR	-	.51 - .79 (13 - 20)	M40 X 1.5	1.57 (40)	1.46 (37)	-	.59 (15)	1.97 (50)
CD40DA-BR	-	.87 - 1.26 (22 - 32)						
CD40DR-BR	-	.79 - 1.02 (20 - 26)	M50 X 1.5	1.97 (50)	1.46 (37)	-	.59 (15)	2.24 (57)
CD50DA-BR	-	1.26 - 1.50 (32 - 38)						
CD50DR-BR	-	.98 - 1.22 (25 - 31)	M63 X 1.5	2.48 (63)	1.50 (38)	-	.59 (15)	2.52 (64) / 2.68 (68)
CD63DA-BR	-	1.46 - 1.73 (37 - 44)						
CD63DR-BR	-	1.14 - 1.38 (29 - 35)						

*Note: VDE rating applies to Metric Dome Fittings only.

Dome Fittings also available with the following approvals:



www.SealconEX.com



Optional Locking Nuts, O-Rings & Other Accessories starting on Page 29 - 40.

