

# Superflex® Speaker Wire

UL Listed

**Product Construction:**

**Conductor:**

- 12 AWG fully annealed stranded bare copper conductor per ASTM B-3

**Insulation/Jacket:**

- Premium-grade, clear Superflex® PVC
- Temperature range: -20°C to +60°C
- Color code: See chart below

**Applications:**


- Digital audio
- Hi-fi and stereo speaker wire
- Jukeboxes
- Not for in-wall use

**Compliances:**

- UL Misc. (UL: 120V)
- RoHS Compliant Directive 2002/95/EC

**Packaging:**

- Please contact Customer Service for packaging and color options

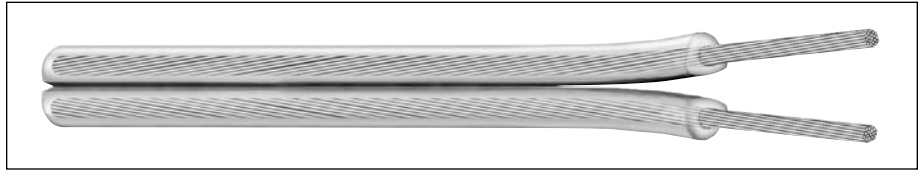

CATALOG NUMBER	NUMBER OF COND.	AWG SIZE	COND. STRAND	NOM. INSULATION THICKNESS		NOMINAL O.D.	
				INCHES	mm	INCHES	mm
<b>C1364</b>	2	12	7x37/36	0.060	1.52	0.220x0.456	5.59x11.58

**Color Code Chart**

ORDERING SUFFIX	STOCK COLOR
<b>90</b>	Clear

**Product Construction:**

**Conductor:**

- 18 AWG, 1 tinned and 1 bare copper conductor per ASTM B-174

**Insulation:**

- Premium-grade, clear PVC

**Jacket:**

- PVC, clear
- Temperature range: -20°C to +60°C

**Applications:**


- Digital audio
- Hi-fi and stereo speaker wire
- Jukeboxes

**Compliances:**

- RoHS Compliant Directive 2002/95/EC

**Packaging:**

- Please contact Customer Service for packaging and color options

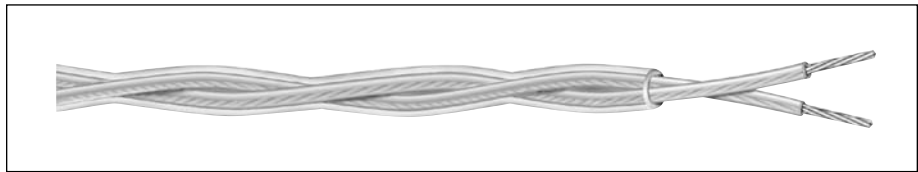

CATALOG NUMBER	NO. OF COND.	AWG SIZE	COND. STRAND	NOM. INSULATION THICKNESS		NOM. JACKET THICKNESS		NOMINAL O.D.	
				INCHES	mm	INCHES	mm	INCHES	mm
<b>C6367</b>	2	18	16/30	0.016	0.41	0.025	0.64	0.210	5.33

**Color Code Chart**

ORDERING SUFFIX	STOCK COLOR
<b>90</b>	Clear