


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
2/3/2010	A	21007	SPECIFICATION UPDATED

Parent Number: F10137-

Description: 10 105/30 TC AWM 1569 or 1581 AWM I A/B

DIAMETER: 0.145
TOLERANCE ± : 0.003

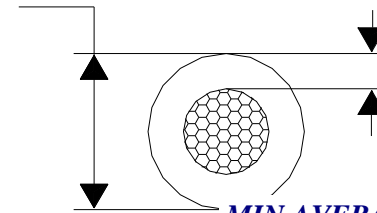

MIN AVERAGE WALL: 0.015

MINIMUM WALL: 0.013

Stranding: 105/30 TC LHL

Style: UL: AWM 1569 or 1581 CSA: AWM I A/B

Insulation: PVC

Print Legend: 10 AWG (5.261mm²) E96824 (PLANT ID CODE) (AWM LOGO) AWM 1569 105C OR 1581 80C 300V VW-1 --- 156016 AWM I A/B 105C 300V FT1

Voltage: 300V

Temperature: 1569=105C, 1581=80C

Notes: 1. Maximum DC Resistance at 20C = 1.11 Ohms/1,000ft per UL 1581.

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

