

CAT. No.

**74841-A**

AUSTRALIAN PLUG, STRAIGHT METAL CORD GRIP, GRAY, 2 POLE 3 WIRE, 20 AMPERE 250 VOLT, (AU3-20P)

APPROVALS


DEPT. of FAIR TRADING

STANDARDS

AS/NZS 3112


**CONFIGURATIONS**

RECEPTACLE



AU3-20R


PLUG



AU3-20P

20 AMPERE 250 VOLT AUSTRALIAN RECEPTACLE AND PLUG POLARIZED (AS/NZS 3112)  
NOTE: RECEPTACLE ALSO ACCEPTS AU1-10P (10 AMPERE 250 VOLT) AND AU2-15P (15 AMPERE 250 VOLT) PLUGS.

ALL DIMENSIONS ARE IN MILLIMETERS

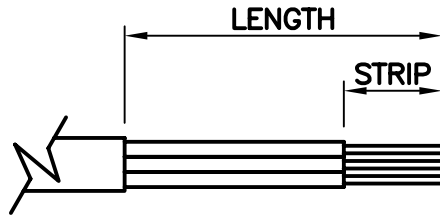

CORDAGE PREPARATION

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 14 DIA (0.551")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 6.0 (10 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	35	10
BLUE	NEUTRAL	35	10
BROWN	LINE	35	10

