


232 Sherman Street Gardner, MA 01440  
 Phone: 978-632-0900 Fax: 978-630-1872  
 Visit us on our website: www.dataguidecable.com

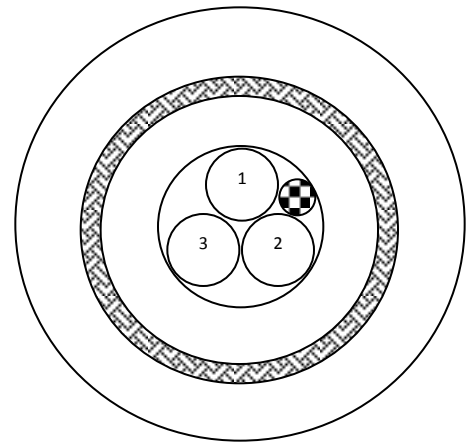

**3 CONDUCTOR 16 AWG PVC INSULATED WITH FOIL SHIELD  
 INNER PVC JACKET, BRAID SHIELD AND OVERALL PVC JACKET  
 UL AWM APPROVED FOR 80C 600VOLTS**

**CONDUCTORS:**

- 16 AWG 26/30 Tinned Copper Insulated with .036" Wall PVC Insulation To .131" Nominal Diameter
- 3 Conductor Total
- Color Coded as Indicated

**CABLE ASSEMBLY:**

- Cabled with 4 1/4" Nominal Left Hand Direction Lay
- .0012" Thickness Aluminum/Polyester Tape Shield, Foil Facing Inward
- 20 AWG Tinned Copper Drain under Tape Shield
- .046" Nominal Wall Thickness White Inner PVC Jacket to .378" Diameter


**BRAID:**

- 34 AWG Tinned Copper Braid, 80% Nominal Coverage

**JACKET:**

- .076" Nominal Wall Thickness White Overall PVC Jacket to .556" +/- .027" Final Diameter

**CABLE IDENTIFICATION:**

- Surface Printed in Black Ink:  
 "E90298  AWM 2463 80C 600V"

**COLOR CODE**

CONDUCTOR	COLOR
1	WHITE
2	GREEN
3	BLACK

**AGENCY APPROVALS**

- UL APPLIANCE WIRING APPROVED MATERIAL STYLE 2463 80C 600VOLTS
- RoHS APPROVED

**REVISION HISTORY**

REV	DATE	BY	DESCRIPTION
0	3/22/00	WD	INITIAL RELEASE
1	11/13/14	WD	NEW FORMAT

Customer Number	1603CSS-9DG
D.G. Part Number	00C16-6
Prepared By:	KAM
Reviewed By:	WJD