

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	16 AWG 19/.0117 STRANDED TINNED COPPER	.057"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS	.089"
CABLE:	(4) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE.	.215"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .279"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C, 80°C & 90°C
 WT./M', NOM., NET. 57.8 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 28 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 4.49 OHMS/M'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 AWM STYLE 2464
 CSA AWM FT4


5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 E118830 (UL) TYPE CM 16 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 90C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:
 1. BLACK
 2. BROWN
 3. LIGHT BLUE
 4. GREEN/YELLOW/YELLOW (30% YELLOW MINIMUM)

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

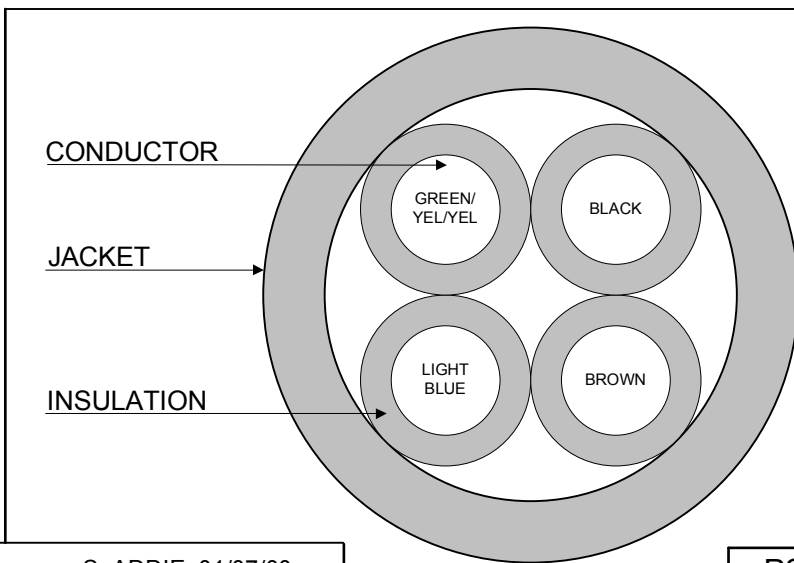

REVISION 05	DATE:	DRAWN S. ADDIE 01/07/00	PS0683
REVISED BY	B. M. DUCZYNSKI 2/16/06	CHECKED G. MUNROE 01/07/00	
CHECKED	J. RIVERNIDER 2/16/06	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 4/C 16 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 04251 1 OF 1