




DESC: 16/4 AWM 2516 105C 600V
 SCALE: 12x DATE: 2/3/97 DR. BY: DPL
 CUSTOMER: INDUSTRIAL ELECTRIC CUSTOMER P/N: 1604COBC-8NWE
 DWG NO: 12333005
 NWI P/N: FAWM164-001

This document contains proprietary and confidential information of Northwire, Inc. (and its subsidiary) and shall not be used, disclosed or reproduced, in whole or in part, for any purpose without the prior written consent of Northwire, Inc. (and its subsidiary).
 Disclaimer: The technical data that is made part of this document may be subject to the International Traffic in Arms Regulation (ITAR) and the Export Administration Regulations (EAR). Disclosure of technical data to Foreign Persons in the course of employment with U.S. contractors is considered an export and is subject to the ITAR and EAR export licensing requirements/regulations.

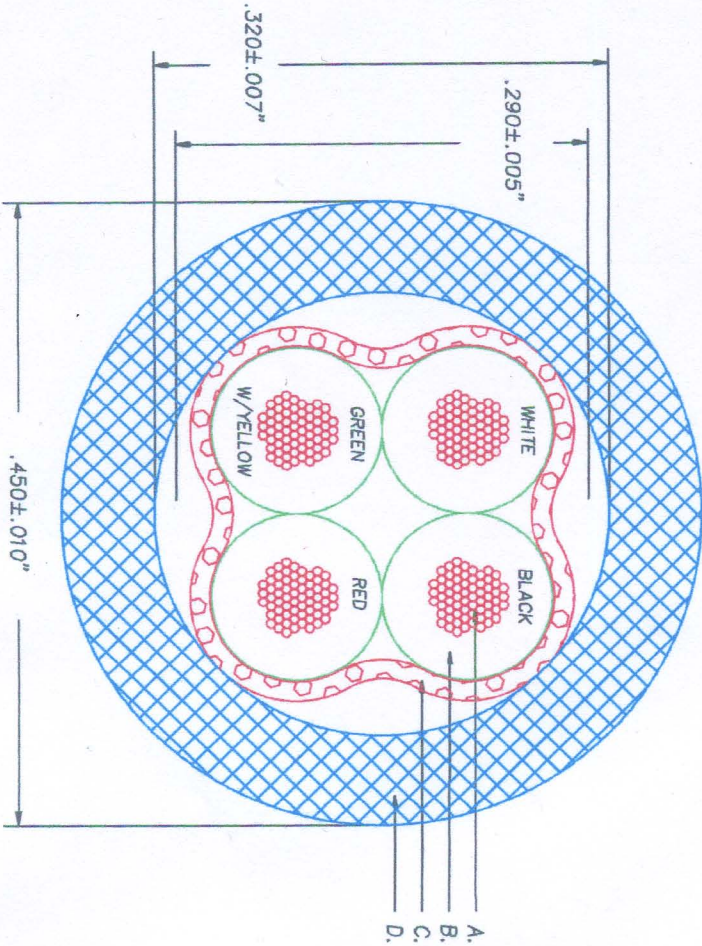

OK to use
 AWM
 1/6/10

ITEM	SPECS
A.	16 GAUGE 65X34BC BUNCHED
B.	30 MILS PVC INSULATION PER UL AWM 1500
C.	27 MILS MIN. PVC INSULATION O.D. $.120 \pm .002"$ 80% MIN. TC BRAID SHIELD
D.	34 GAUGE SINGLE ENDS 45 MILS TUBED PVC JACKET 105C 600V 36 MILS MIN. PVC JACKET GRAY JACKET UL AND CSA RECOGNIZED

ROHS COMPLIANT MATERIALS USED

CABLE DOES NOT CONTAIN ANY OF THE SIX HAZARDOUS SUBSTANCES LISTED BY THE CHINESE ROHS DIRECTIVE

- A.
- B.
- C.
- D.

ELECTRICAL REQUIREMENTS:
 NONE SPECIFIED

MECHANICAL REQUIREMENTS:
 NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

CONTROLLED
 1-7-11

ADDED COMMENT ON CHINESE ROHS	D	1/4/11	DPL
CHANGED GRAY JACKET COLOR; ADDED ROHS COMMENT	C	12/16/10	DPL
CHANGED CUSTOMER PART NUMBER	B	11/14/06	DPL
INITIAL RELEASE	A	2/3/97	DPL

REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R

28-1043-R