


**CONDUCTORS** - 16 AWG (19X.0117") TINNED COPPER INSULATED WITH .032" NOMINAL WALL OF PVC TO A NOMINAL O.D. OF .120".  
(COLOR CODE SEE DRAWING BELOW)

**TAPE**  
.001" TISSUE PAPER

**CORE FILLER**  
POLYPROPYLENE AS  
REQUIRED FOR ROUNDNESS

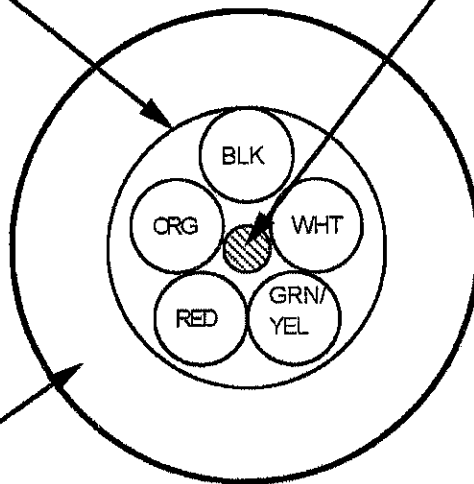

**JACKET** - .045" NOMINAL WALL OF PRESSURE EXTRUDED \*SPECIAL GRAY (AMERLINE) PVC TO A NOMINAL O.D. OF .417" +/- .010"

**SURFACE PRINT (black ink)**

"(UL) CL2 16 AWG 105C E95534 OR AWM 80C 600V --  
CSA AWM I/II A/B 80C 600V FT4 LL91737"

**DATA GUIDE**

232 SHERMAN STREET  
GARDNER, MA 01440  
978-632-0900

CABLE CORP.

REV	DESCRIPTION	DATE	APP.
1	UPDATE ADDRESS & ROHS	5/11/11	
0	FIRST ISSUE	8/1/03	

TITLE		5 CONDUCTOR #16 CABLE RoHS COMPLIANT	
SCALE	P/N	REV	
N/A	98K6-6		
DATE	DRN. BY	APP. BY	
8/03	WJD		