

Delco Wire and Cable Product datasheet. Please call your sales rep for details.

PRODUCT DATA SHEET

38704 16 AWG 4 PR PVC FOIL SHIELD CSA style - AWM A/B, CMG ...UL style - CM, CMR/CL3R TO ORDERFlame Test - FT4

Product Number: 38704
 Description: 16 AWG (26 X 30) TC 4 PR SR-PVC INSULATION, O/A ALUM/POLY SHIELD, STC DRAIN, GRAY PVC JACKET

Image file:

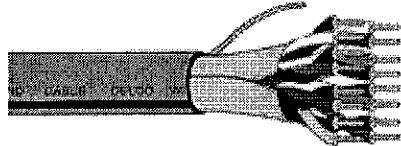


Image shown is a representation and does not necessarily reflect the actual product

AWG: 16
 Stranding: 26 X 30
 Conductor: TC
 Insulation: 0.015 inch SR-PVC
 Number Conductors: 8
 Number Pairs: 4
 Capacitance: 39 pf/FT (conductor to conductor)
 75 pf/FT (1 cond. and other conductors connected to shield)
 First Shield: O/A ALUM/POLY
 First Drain: STC
 Jacket Type: GRAY PVC
 Nom. Cable OD: 0.434
 Voltage: 600
 Temperature: -20°C to +105°C
 Weight: 126 lbs/mft
 CSA: AWM A/B, CMG
 UL: CM, CMR/CL3R TO ORDER
 Flame Test: FT4

Table 3

1 Black/Red	2 Black/White	3 Black/Green
4 Black/Blue	5 Black/Yellow	6 Black/Brown
7 Black/Orange	8 Red/White	9 Red/Green
10 Red/Blue	11 Red/Yellow	12 Red/Brown
13 Red/Orange	14 Green/White	15 Green/Blue
16 Green/Yellow	17 Green/Brown	18 Green/Orange
19 White/Blue	20 White/Yellow	21 White/Brown
22 White/Orange	23 Blue/Yellow	24 Blue/Brown
25 Blue/Orange	26 Brown/Yellow	27 Brown/Orange
28 Orange/Yellow	29 Violet/Orange	30 Violet/Red
31 Violet/White	32 Violet/Green	33 Violet/Blue
34 Violet/Yellow	35 Violet/Brown	36 Violet/Black
37 Gray/White		

Notes: 25% OVERLAP 100% COVERAGE
 Application: COMPUTERS EIA RS-232, DATA TRANSMISSION, AUDIO AND BROADCAST

Delco Wire and Cable Limited
 Although every attempt is made to insure the accuracy of this document, Delco Wire and Cable Limited can neither express any warranties nor assume any liabilities.

© Delco Wire and Cable Limited 2011
 sales@delcowire.com