



DESC: 16/8 CABLE 105°C 300V

DWG NO: 1608C011

SCALE: 15x

DATE: 5/19/05

DR. BY: DP LANGER

NWI NO: FCAB168-006


CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: TRC1608G-0-XDL

ITEM	SPECS.
A.	16 GAUGE GXL CONDUCTORS 19 STRAND BC .107 O.D. SUPLLED BY IEWC
B.	POLY FILLER
C.	18 GAUGE 16x30TC DRAIN
D.	ALUMINUM FOIL SHIELD, FOIL IN 25% MIN. OVERLAP 100% COVERAGE
E.	30 MILS TUBED PVC JACKET 105°C 300V 24 MILS MIN. PVC JACKET BLACK JACKET CABLE IS NOT UL OR CSA APPROVED

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

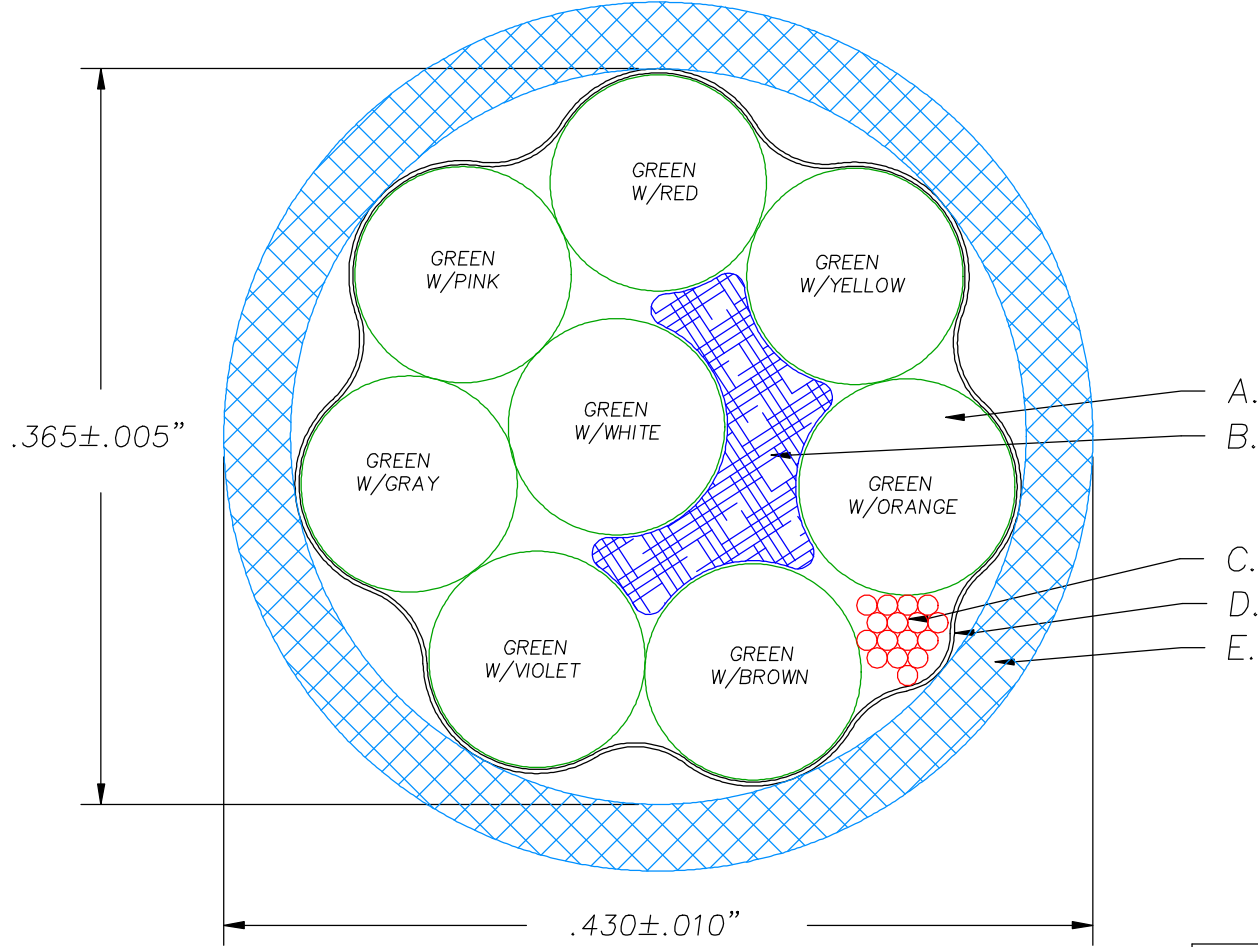

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

INITIAL RELEASE	A	5/19/05	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL