

1) CONSTRUCTION:
 CONDUCTOR: 16 AWG 26/30 STRANDED TINNED COPPER
 INSULATION: POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS
 CABLE: (15) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE.
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS
 NOM. DIA.
 .058"
 .090"
 .422"
 OVERALL CABLE DIAMETER .486"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 105° C
 WT./M', NOM., NET. 188.3 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 23 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 2000V RMS
 VOLTAGE RATING, MAX. 600V
 D.C. RESISTANCE, MAX. PER ASTM B286 4.59 Ω/1000'


4) AGENCY APPROVALS:
 (UL) AWM STYLE 2586
 CSA AWM FT4
 MEETS (UL) VW-1 FLAME TEST

5) APPLICATION:
 RoHS COMPLIANT MATERIALS.


6) PRINT:

QUABBIN P/N 15014 AWM 2586 VW-1 -- CSA LL51726 AWM I/II A/B 105C 600V FT4 -- RoHS -- (LOT DESIGNATOR)

- 7) COLOR CODE:
 1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. ORANGE
 6. BLUE
 7. WHITE/BLACK
 8. RED/BLACK
 9. GREEN/BLACK
 10. ORANGE/BLACK
 11. BLUE/BLACK
 12. BLACK/WHITE
~~13. RED/WHITE~~
 14. GREEN/ WHITE
 15. BLUE/WHITE

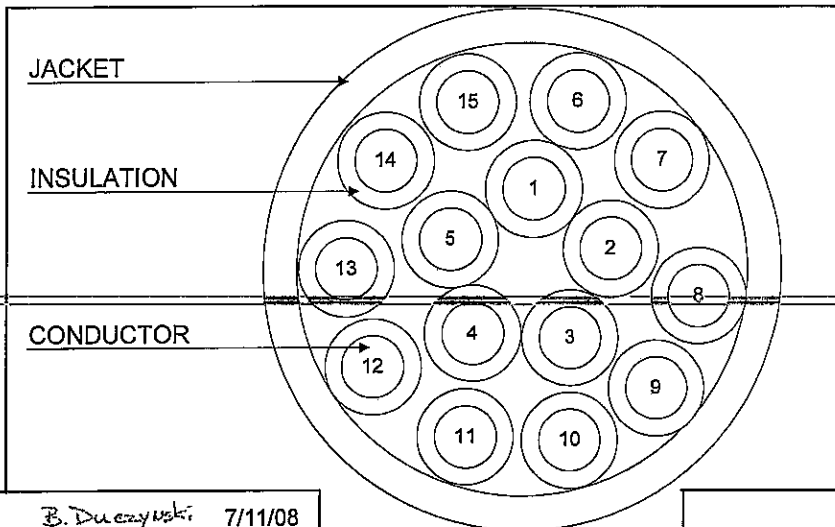

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING.

REVISION 02	DATE:	DRAWN <i>B. Duceyuski</i> 7/11/08	
REVISED BY	<i>B. Duceyuski</i> 7/15/08	CHECKED <i>G. Munn</i> 07/11/08	
CHECKED	<i>G. Munn</i> 07/15/08	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 15/C 16 AWG PVC/PVC CABLE -- STYLE 2586, CSA AWM FT4
			QUABBIN P/N 15014 1 OF 1