


METRIC

466-6

CERTIFICATIC
 NO DEVIATION OR CHANG
 WITHOUT ENGRG APPROVA

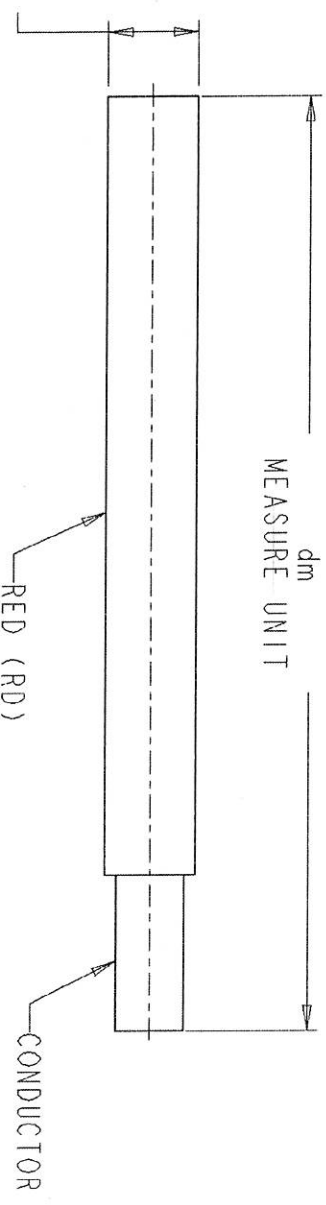

3.3 NOMINAL

CONDUCTOR----- 3 mm²/12 AWG (19/25 STRANDED NICKEL PLATED COPPER)

INSULATION----- POLYTETRAFLUOROETHYLENE (PTFE)

VOLTAGE RATING----- 600 V

OPERATING TEMP RATING----- -70°C TO +250°C

APPROVALS----- CONFORMS TO UL STYLE 1659

MATERIAL	HT TR
A IE1541F	WROUGHT MATL
IE4246B	ELEK SUBSTANCE
IE2722F	DRAWING
IE2442J	APPROVAL
IE2442A	APPROVAL
IE0507D	IDENT
IE0198R	BRAND MARKINGS
IE0013Y	CONFIDENTIALIT
IE0012A	INTERPRETATION
IE0011	INTPR & TOL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm DIMENSIONS W/O TOL ARE BASIC	VERSION TYPE	SE
PROD. <input checked="" type="checkbox"/> OTHER	Confidential Yellow	
THIRD ANGLE PROJECTION	SHEET	DWG CONTROL

CATERPILLAR

THE INFORMATION HEREON IS THE PROPERTY OF CATERPILLAR SUBSIDIARIES. WITHOUT WRITTEN PERMISSION, ANY COPYING, REPRODUCTION, OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, IS PROHIBITED. OTHERS, AND ANY USE EXCEPT THAT FOR WHICH IT IS LOANED.

WIRE-BULK (ELECTRIC (12 AWG)(RED))

466-6719

NOTE A: ASTM B355