


METRAIC

466-6

CERTIFICATIC
 NO DEVIATION OR CHANG
 WITHOUT ENGRG APPROVA

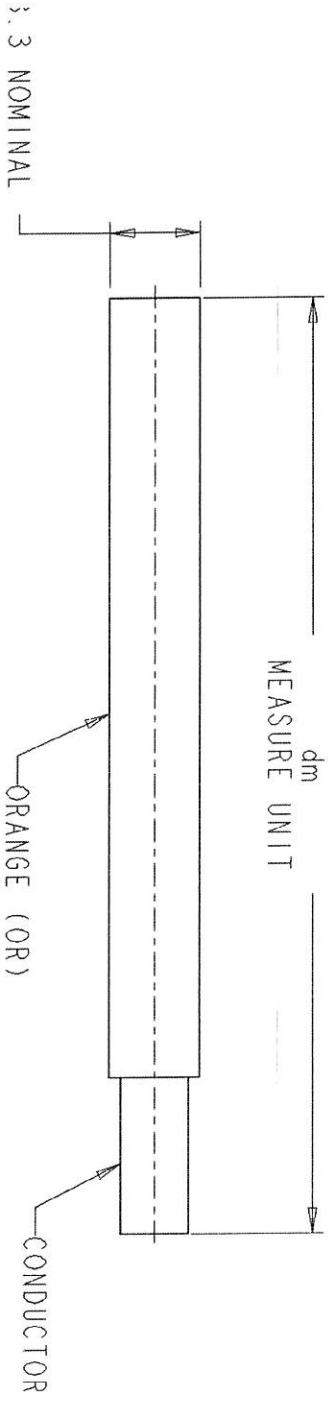

CONDUCTOR----- 3 mm²/12 AWG (19/25 STRANDED NICKEL PLATED COPPER)
 INSULATION----- POLYTETRAFLUOROETHYLENE (PTFE)
 VOLTAGE RATING----- 600 V
 OPERATING TEMP RATING----- -70°C TO +250°C
 APPROVALS----- CONFORMS TO UL STYLE 1659

MATL	HT
A	IE1541F
	WROUGHT MATL
	IE4246B
	ELEK SUBSTANCE
	IE2722F
	DRAWING
	IE2442J
	APPROVAL
	IE2442A
	APPROVAL
	IE0507D
	IDENT
	IE0198R
	BRAND MARKINGS
	IE0013Y
	CONFIDENTIALIT
	IE0012A
	INTERPRETATION

HT	HT
	INIPR & TOL
	IE0011
	INIPR & TOL
	PROD. X OTHER

UNLESS OTHERWISE SPECIFIED	VERSION
DIMENSIONS ARE IN mm	TYPE
DIMENSIONS W/O TOL ARE BASIC	SE
THIRD ANGLE PROJECTION	SHEET
DWG CONTROL	DWG CONTROL



THE INFORMATION HEREON IS THE PROPERTY OF CATERPILLAR
 OTHERS. AND ANY USE EXCEPT THAT FOR WHICH IT IS LOANED

WIRE-BULK (ELECTRIC
 (12 AWG)(ORANGE)

466-6714

NOTE A: ASTM B355