


METRIC

466-6

CERTIFICATIC
 NO DEVIATION OR CHANG
 WITHOUT ENGRG APPROVA

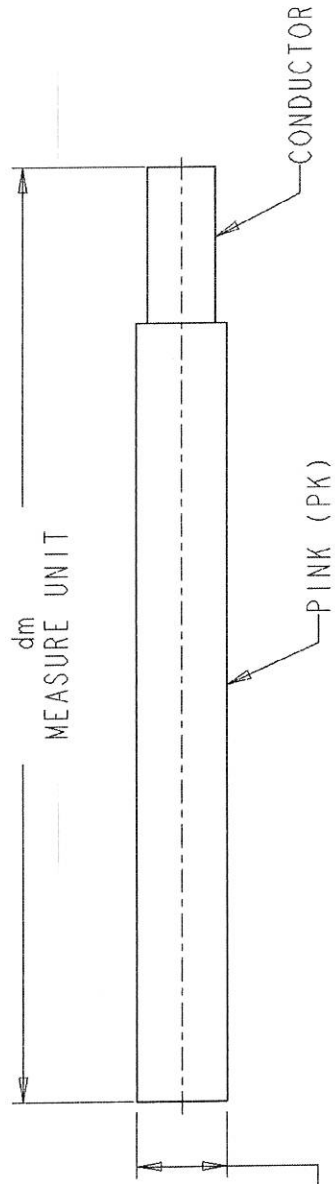

CONDUCTOR----- 1 mm²/16 AWG (19/29 STRANDED NICKEL PLATED COPPER)
 INSULATION----- POLYTETRAFLUOROETHYLENE (PTFE)
 VOLTAGE RATING----- 600 V
 OPERATING TEMP RATING----- -70°C TO +250°C
 APPROVALS----- CONFORMS TO UL STYLE 1659

MATL	A	IE1541F	WROUGHT MATL
HTTR			
		IE4246B	ELEK SUBSTANCE
		IE2722F	DRAWING
		IE2442J	APPROVAL
		IE2442A	APPROVAL
		IE0507D	IDENT
		IE0198R	BRAND MARKINGS
		IE0013Y	CONFIDENTIALIT
		IE0012A	INTERPRETATION
NOTE		IE0011	INTPR & TOL

Caterpillar: Confidential Yellow

PROD. OTHER
 UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN mm
 DIMENSIONS W/O TOL ARE BASIC

THIRD ANGLE
 PROJECTION
 SHEET
 DWG CONTROL

CATERPILAR

THE INFORMATION HEREON IS THE PROPERTY OF CATERPILAR
 SUBSIDIARIES. WITHOUT WRITTEN PERMISSION, ANY COPYING,
 OTHERS, AND ANY USE EXCEPT THAT FOR WHICH IT IS LOANED

WIRE-BULK (ELECTRIC
 (16 AWG)(PINK)

NOTE A: ASTM B355

466-6710
 VER