


Digital Audio Snake Cable

AES/EBU 110 Ohm Multi-Pair Individually Shielded & Jacketed, NEC Type CM/CL2

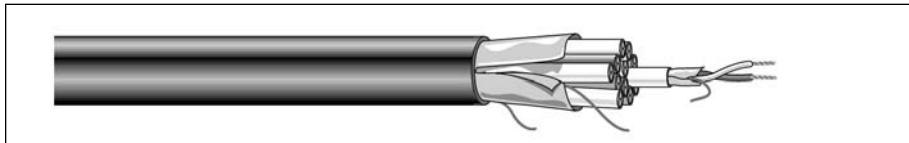

| CATALOG NUMBER | CONDUCTOR | INSULATION & O.D. | SHIELD (COV.) | JACKET & O.D. | WT. #/m | IMPED. OHMS | CAPAC. pF/ft. |
|----------------|--|----------------------------|---|---------------------------------|---------|-------------|---------------|
| 740601 | 1/PR 24 AWG Stranded 7/32 Tinned Copper | HD-Cellular PE 0.066" Nom. | Individual Foil w/ 24 AWG Drain Overall Foil w/ 18 AWG Drain | FR-PVC Matte Finish 0.176" Nom. | 13.5 | 110 | 12.5 |
| 740604 | 4/PR 24 AWG Stranded 7/32 Tinned Copper | HD-Cellular PE 0.066" Nom. | Individual Foil w/ 24 AWG Drain Overall Foil w/ 18 AWG Drain | FR-PVC Matte Finish 0.525" Nom. | 100 | 110 | 12.5 |
| 740608 | 8/PR 24 AWG Stranded 7/32 Tinned Copper | HD-Cellular PE 0.066" Nom. | Individual Foil w/ 24 AWG Drain Overall Foil w/ 18 AWG Drain | FR-PVC Matte Finish 0.700" Nom. | 183 | 110 | 12.5 |
| 740612 | 12/PR 24 AWG Stranded 7/32 Tinned Copper | HD-Cellular PE 0.066" Nom. | Individual Foil w/ 24 AWG Drain Overall Foil w/ 18 AWG Drain | FR-PVC Matte Finish 0.850" Nom. | 250 | 110 | 12.5 |
| 740616 | 16/PR 24 AWG Stranded 7/32 Tinned Copper | HD-Cellular PE 0.066" Nom. | Individual Foil w/ 24 AWG Drain Overall Foil w/ 18 AWG Drain | FR-PVC Matte Finish 1.000" Nom. | 370 | 110 | 12.5 |
| 740620 | 20/PR 24 AWG Stranded 7/32 Tinned Copper | HD-Cellular PE 0.066" Nom. | Individual Foil w/ 24 AWG Drain Overall Foil w/ 18 AWG Drain | FR-PVC Matte Finish 1.100" Nom. | 425 | 110 | 12.5 |

NOTE: General Cable manufactures the above cables in a wide range of alternate AWG sizes, pair counts and jacket colors. Please consult Customer Service for details.

Product Construction:

Conductor:

- 24 AWG stranded tinned copper
- Twisted pairs

Insulation:

- High-density foamed polyethylene

Shield:

- Individually shielded pairs with 24 AWG drain wire
- Overall foil shield with 18 AWG drain wire

Jacket:

- PVC, matte black
- High-flex, flame-retardant

Applications:

- Digital audio
- Interconnection and audio components for console board equipment used in recording studios, radio and television stations, and post-production facilities
- Sound system installations

Features:

- High impedance, 78% velocity and low capacitance providing error-free transmissions over extended distances
- PVC jacketing compound for ultimate cosmetics, durability and flexibility
- Jacketed pairs can be split out of overall jacket for any length without use of heat-shrink tubing
- Individual pair jackets are color-coded and number-printed for easy identification

Compliances:

- NEC Article 725 Type CL2
- NEC Article 800 Type CM
- Meets/exceeds requirements of Audio Engineering Society (AES) and European Broadcast Union (EBU)

Packaging and Jacket Colors:

- Please consult Customer Service for packaging and color options