

CAM-TYPE CONNECTORS (UP TO 400A, 600V)

16 Series, Taper Nose

Description	Color	Cat. No. Complete	Cat. No. Contact	Cat. No. Insulator
Male Detachable Plug - Single Set Screw (Cable Size: 1/0-4/0)	White	16D23-W	16D23-C*	16SDM-14W
	Black	16D23-E	16D23-C*	16SDM-14E
	Brown	16D23-H	16D23-C*	16SDM-14H*
	Red	16D23-R	16D23-C*	16SDM-14R
	Blue	16D23-B	16D23-C*	16SDM-14B
	Orange	16D23-O	16D23-C*	16SDM-14O
	Green	16D23-G	16D23-C*	16SDM-14G
	Yellow	16D23-Y	16D23-C*	16SDM-14Y
Female Detachable Plug - Single Set Screw (Cable Size: 1/0-4/0)	White	16D32-W	16D32-C*	16SDF-14W
	Black	16D32-E	16D32-C*	16SDF-14E
	Brown	16D32-H	16D32-C*	16SDF-14H*
	Red	16D32-R	16D32-C*	16SDF-14R
	Blue	16D32-B	16D32-C*	16SDF-14B
	Orange	16D32-O	16D32-C*	16SDF-14O*
	Green	16D32-G	16D32-C*	16SDF-14G
	Yellow	16D32-Y	16D32-C*	16SDF-14Y*



16D23-B




16D32-W

* Contact factory for availability.


TESTING AND CODE COMPLIANCE

- NEMA 3R-Rated (rainproof) for use outdoors
- Only Double Set Screw Version UL/CSA

DIMENSIONS

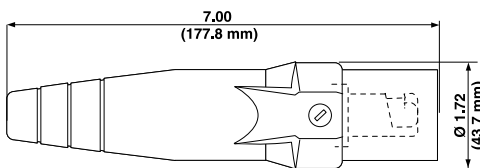

Male Detachable Plug - Single Set Screw

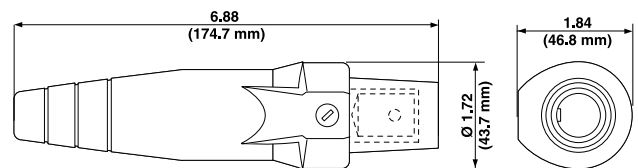

Female Detachable Plug - Single Set Screw