

CAM-TYPE CONNECTORS (UP TO 400A, 600V)

16 Series, Taper Nose  

| Description | Color | Cat. No. | Cat. No. | Cat. No. |
|--|--|----------|----------|-------------|
| | | Complete | Contact | Insulator |
| Male Detachable Plug - Double Set Screw (Cable Size: 1/0-4/0) | White | 16D24-W | 16D24-C | 16SDM-14W* |
| | Grey | 16D24-GY | 16D24-C | 16SDM-14GY* |
| | Black | 16D24-E | 16D24-C | 16SDM-14E* |
| | Brown | 16D24-H | 16D24-C | 16SDM-14H* |
| | Red | 16D24-R | 16D24-C | 16SDM-14R* |
| | Blue | 16D24-B | 16D24-C | 16SDM-14B* |
| | Orange | 16D24-O | 16D24-C | 16SDM-14O* |
| | Green | 16D24-G | 16D24-C | 16SDM-14G* |
| | Yellow | 16D24-Y | 16D24-C | 16SDM-14Y* |
| | Female Detachable Plug - Double Set Screw (Cable Size: 1/0-4/0) | White | 16D33-W | 16D33-C* |
| Grey | | 16D33-GY | 16D33-C* | — |
| Black | | 16D33-E | 16D33-C* | 16SDF-14E |
| Brown | | 16D33-H | 16D33-C* | 16SDF-14H* |
| Red | | 16D33-R | 16D33-C* | 16SDF-14R |
| Blue | | 16D33-B | 16D33-C* | 16SDF-14B* |
| Orange | | 16D33-O | 16D33-C* | 16SDF-14O* |
| Green | | 16D33-G | 16D33-C* | 16SDF-14G* |
| Yellow | | 16D33-Y | 16D33-C* | 16SDF-14Y* |



16D33-O




16D24-E

* Contact factory for availability.


TESTING AND CODE COMPLIANCE

- Meets UL Standards (File #E13399)
- NEMA 3R-Rated (rainproof) for use outdoors
- CSA Certified (File #152105)

DIMENSIONS

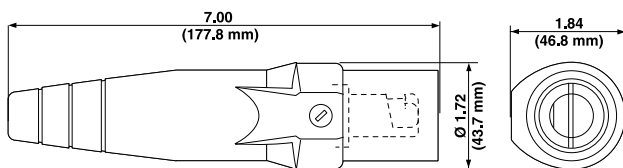

Male Detachable Plug – Double Set Screw

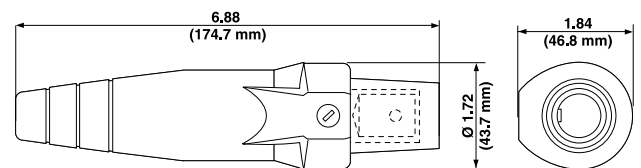

Female Detachable Plug – Double Set Screw