

**CAM-TYPE CONNECTORS (UP TO 400A, 600V)**

**16 Series, Taper Nose**  

Description	Color	Cat. No.	Cat. No.	Cat. No.
		Complete	Contact	Insulator
Male Detachable Plug - Double Set Screw (Cable Size: 1/0-4/0)	White	16D24-W	16D24-C	16SDM-14W*
	Grey	16D24-GY	16D24-C	16SDM-14GY*
	Black	16D24-E	16D24-C	16SDM-14E*
	Brown	16D24-H	16D24-C	16SDM-14H*
	Red	16D24-R	16D24-C	16SDM-14R*
	Blue	16D24-B	16D24-C	16SDM-14B*
	Orange	16D24-O	16D24-C	16SDM-14O*
	Green	16D24-G	16D24-C	16SDM-14G*
	Yellow	16D24-Y	16D24-C	16SDM-14Y*
Female Detachable Plug - Double Set Screw (Cable Size: 1/0-4/0)	White	16D33-W	16D33-C*	16SDF-14W*
	Grey	16D33-GY	16D33-C*	—
	Black	16D33-E	16D33-C*	16SDF-14E
	Brown	16D33-H	16D33-C*	16SDF-14H*
	Red	16D33-R	16D33-C*	16SDF-14R
	Blue	16D33-B	16D33-C*	16SDF-14B*
	Orange	16D33-O	16D33-C*	16SDF-14O*
	Green	16D33-G	16D33-C*	16SDF-14G*
	Yellow	16D33-Y	16D33-C*	16SDF-14Y*



16D33-O




16D24-E

\* Contact factory for availability.


**TESTING AND CODE COMPLIANCE**

- Meets UL Standards (File #E13399)
- NEMA 3R-Rated (rainproof) for use outdoors
- CSA Certified (File #152105)

**DIMENSIONS**

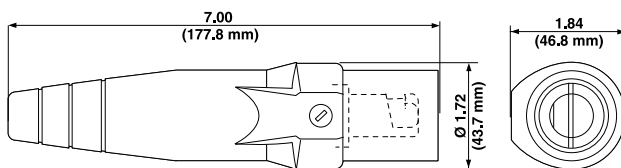

Male Detachable Plug – Double Set Screw

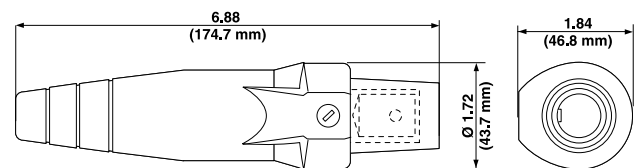

Female Detachable Plug – Double Set Screw