

CAM-TYPE CONNECTORS (UP TO 400A, 600V)

16 Series, Taper Nose  

Description	Color	Cat. No.	Cat. No.	Cat. No.
		Complete	Contact	Insulator
Male Detachable Plug - Crimped (Cable Size: 1/0-2/0)	White	16D26-W*	16D26-C*	16SDM-22W
	Black	16D26-E	16D26-C*	16SDM-22E
	Brown	16D26-H*	16D26-C*	16SDM-22H*
	Red	16D26-R*	16D26-C*	16SDM-22R
	Blue	16D26-B*	16D26-C*	16SDM-22B
	Orange	16D26-O*	16D26-C*	16SDM-22O*
	Green	16D26-G	16D26-C*	16SDM-22G
	Yellow	16D26-Y*	16D26-C*	16SDM-22Y*
Female Detachable Plug - Crimped (Cable Size: 1/0-2/0)	White	16D35-W*	16D35-C*	16SDF-22W
	Black	16D35-E	16D35-C*	16SDF-22E
	Brown	16D35-H*	16D35-C*	16SDF-22H*
	Red	16D35-R*	16D35-C*	16SDF-22R
	Blue	16D35-B*	16D35-C*	16SDF-22B
	Orange	16D35-O*	16D35-C*	16SDF-22O*
	Green	16D35-G	16D35-C*	16SDF-22G
	Yellow	16D35-Y*	16D35-C*	16SDF-22Y*



16D26-G




16D35-Y

* Contact factory for availability.


TESTING AND CODE COMPLIANCE

- Meets UL Standards (File #E13399)
- NEMA 3R-Rated for use outdoors
- CSA Certified (File #152105)

DIMENSIONS

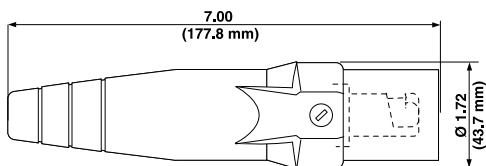

Male Detachable Plug - Crimped

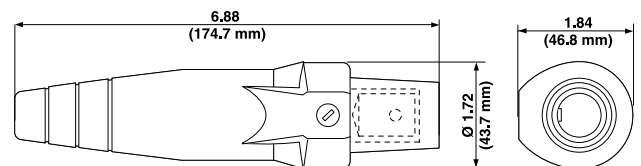

Female Detachable Plug - Crimped